


Diffuser Removal


1

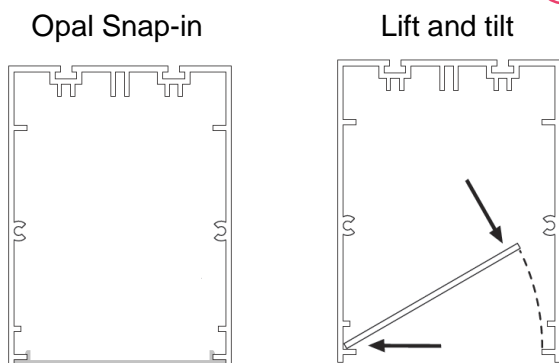

LED Tray Removal

2a


Remove the corresponding LED tray from over the bracket mounting to allow access

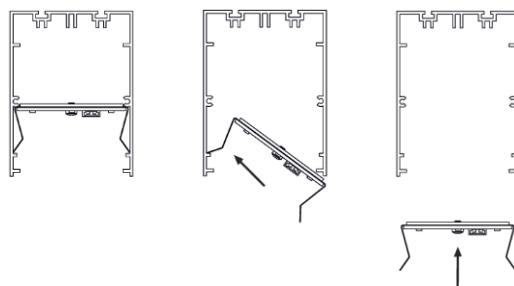

LED Tape Removal

2b

Unclip the FIRO profile from the white plastic mounting clips — *NB # don't hang the profile from the wires.*



Mounting The Boss

3


Screw the boss to the ceiling



Profile Brackets

4


Slide the bracket into the QUAD suspension channels, and secure in place with the mounting barrel.

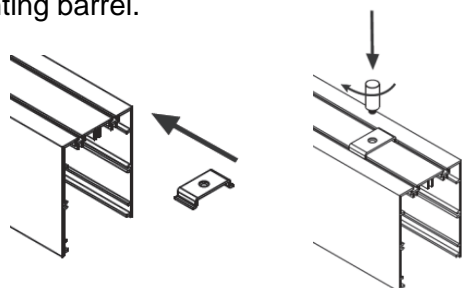

Mounting The Profile

5

Lift the profile into position, locking the barrel into the boss with a grub screw.



Wiring

6

Ensure all terminations are complete and secure.
Please use document
Optelma Wiring Instructions – REV V


Reassembly Of Luminaire

7

Reassembly is the reverse of the previous stages 1 and 2.

Additional Fixings - End Cap

Two countersunk screws hold each endcap to the profile

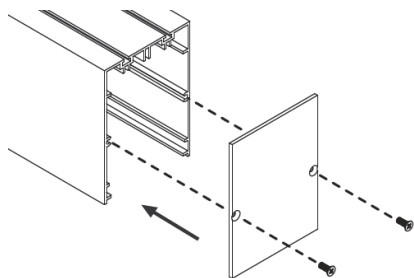

Additional Fixings – Flush Connector

Four screws in each profile to grip the flush connector, do not overtighten.

