


Diffuser Removal

1

Opal Snap-in


Lift and tilt

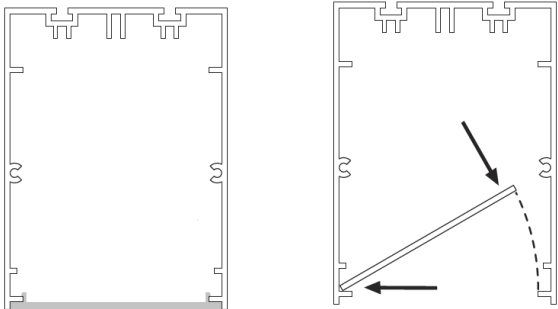

LED Tray Removal

2a


Remove the corresponding LED tray from over the bracket mounting to allow access

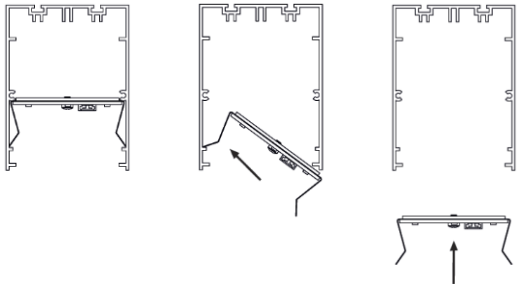

LED Tape Removal

2b


Unclip the FIRO profile from the white plastic mounting clips — *NB # don't hang the profile from the wires.*



Mounting The Boss

3


Screw the boss to the ceiling and slide the suspension wire into the mating boss, screw into the ceiling boss.



Profile Brackets

4


Screw the splitter cable into the clutch using grub screw, and slide into the profile.

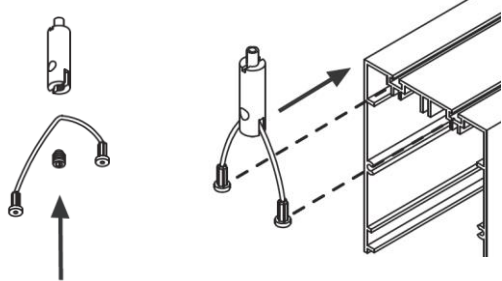

Mounting The Profile

5

Push the wire through the clutch and adjust to height, snip off any access



Wiring

6

Ensure all terminations are complete and secure.
Please use document
Optelma Wiring Instructions – REV V


Reassembly Of Luminaire

7

Reassembly is the reverse of the previous stages 1 and 2.

Additional Fixings - End Cap

Two countersunk screws hold each endcap to the profile

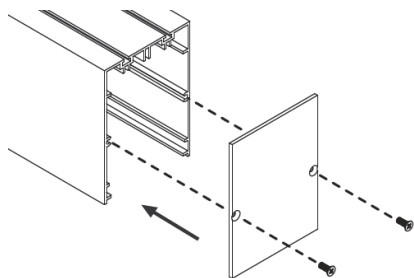

Additional Fixings – Flush Connector

Four screws in each profile to grip the flush connector, do not overtighten.

