



FLAT 5

Product Code: FT05.XX.XXX.XX

Product description:

Shallow 27mm deep downlight with a 180x180mm square trim, finished in White. With a beam angle of 90° and colour temperatures from 3000K to 4000K, Flat 5 provides project specific solutions. Luminous flux ranges from 1220-1390lm at 15W, with dimmable driver options available and a CRI of 80+. A durable downlight with a lifetime of 50,000 hours under normal conditions. Luminaire Warranty 5 years, Driver 3 Years.

Use the Project Datasheet generator to get a tailored specification. Additional features include emergency options and RAL finishes on request.

5 YEAR
GUARANTEE


Product options	For exact specifications create a Project Datasheet
Dimensions (mm):	180x180 x 27.
Cut-out (mm):	160x160.
Lifetime:	50,000 hrs.
Mounting type:	Recessed.
Finish:	White.
Emergency:	Standard Integrated, DALI Integrated.

Lighting options	For exact specifications create a Project Datasheet
Light source:	15W LED.
Driver:	Fixed Output, 0-10V, DALI, L&TE.
Colour temperature:	3000K, 4000K.
Beam angle:	90°.
Diffuser:	Opal, MPO.
Operating voltage:	230V.
IP Rating:	IP20.
CRI:	>80.
Delivered Lumens (lm):	1220-1390.
Power consumption (W):	15.
Efficiency (lm/W):	93.
Optional Extras:	RAL finishes on request.

Additional Info


Add notes ...

Cross-section



Flat 5 (15W) cross-section

Photometrics

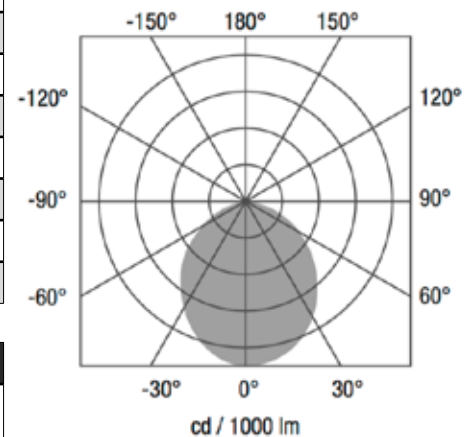

(Curve shown for 3000K with 90° beam angle)

