



# OPTEFLEX COLOUR AMBER

Product Code: OXCA.XX.8XX.XX

## Product description:


Opteflex Colour AMBER is a Linear SMD LED for feature applications, available in powers ranging from 4.8W to 28.8W, perfect for use within linear aluminium extrusions. Its Epistar SMD LEDs come IP20 rated as standard, also available in IP65 upon request, and supply 90 to 540lm. Supplied in 5000mm lengths with 3M adhesive tape fixing, it has cut-points every 100mm or less to achieve project-specific dimensions. The very latest in LED lighting technology offers 'instant on' and efficient light control.

Product options	For exact specifications create a Project Datasheet				
Width (mm):	9	9	11	13	16
Cut-points (mm):	100	50	100	25	50
Lifetime:	50,000 hrs.				
Mounting type:	Surface Mounted 3M adhesive tape.				
Finish:					
Emergency:					

Lighting options	For exact specifications create a Project Datasheet				
Light source:	Linear SMD LED.				
Driver:	Fixed Output, 0-10V, DALI, DMX, Mains.				
Colour temperature:	(AMBER)				
Beam angle:	120°				
LEDs per metre:	60	120	60	2 x 120	2 x 60
Operating voltage:	24V.				
IP Rating:	IP20				
CRI:	> 80				
Delivered Lumens (lm/M):	90	180	270	360	540
Power consumption (W/M):	<b>4.8</b>	<b>9.6</b>	<b>14.4</b>	<b>19.2</b>	<b>28.8</b>
Efficiency (lm/W):	up to 18.75				
Optional Extras:					

Additional Info
Add notes ...

## Cross-section

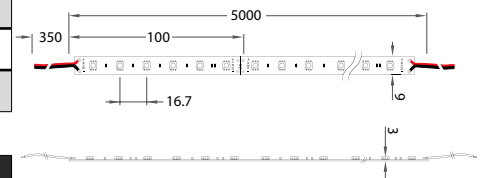

## Photometrics

