

## OPTEFLEX RGB

Product Code: OXRG.XX.8XX.XX

### Product description:


Opteflex Colour RGB is a full-spectrum RGB Linear SMD LED for feature applications. It is only 10mm wide and is perfect for use within linear aluminium extrusions. Its Epistar '5050' SMD LEDs total 30 to 60 per metre, depending on a choice of 7.2W or 14.4W supplying between 500 – 1000lm. It is also available in IP65 upon request. Supplied in 5000mm lengths with 3M adhesive tape fixing, it has cut-points every 100mm to achieve project-specific dimensions. The very latest in LED lighting technology offers 'instant on' and efficient light control.

Product options	For exact specifications create a Project Datasheet	
Width (mm):	10	
Cut-points (mm):	165	100
Lifetime:	50,000 hrs.	
Mounting type:	Surface Mounted 3M adhesive tape.	
Finish:		
Emergency:		

Lighting options	For exact specifications create a Project Datasheet	
Light source:	Linear SMD LED.	
Driver:	DMX.	
Colour temperature:	(RGB)	
Beam angle:	120°	
LEDs per metre:	30	60
Operating voltage:	24V.	
IP Rating:	IP20	
CRI:	> 80	
Delivered Lumens (lm/M):	< 500	< 1000
Power consumption (W/M):	<b>7.2</b>	<b>14.4</b>
Efficiency (lm/W):	up to 69.4	
Optional Extras:		

Additional Info
Add notes ...

### Cross-section

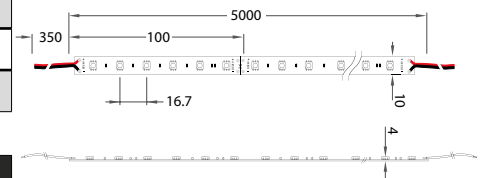

### Photometrics

