

# OPTEFLEX TWINLINE 1

Product Code: OXD1.XX.8XX.XX

## Product description:


Opteflex Twin-line 1 is a 28.8W per metre linear LED that is 28mm wide, designed for use in linear aluminium extrusions. It is available in colour temperatures of 2700K, 3000K and 4000K. Its twin lines of '5050' SMD LEDs total 120 per metre and supply 1800 – 2070lm. Supplied in 5000mm lengths with 3M adhesive tape fixing, it has cut-points every 50mm to achieve project-specific dimensions. The very latest in LED lighting technology offers 'instant on' and efficient light control.

Product options	For exact specifications create a Project Datasheet
Width (mm):	28
Cut-points (mm):	50
Lifetime:	50,000 hrs.
Mounting type:	Surface Mounted 3M adhesive tape.
Finish:	
Emergency:	

Lighting options	For exact specifications create a Project Datasheet
Light source:	Linear SMD LED.
Driver:	Fixed Output, 0-10V, DALI, DMX, Mains.
Colour temperature:	2700K, 3000K, 4000K.
Beam angle:	120°
LEDs per metre:	120
Operating voltage:	24V.
IP Rating:	IP20
CRI:	> 80
Delivered Lumens (lm/M):	1800 - 2070
Power consumption (W/M):	<b>28.8</b>
Efficiency (lm/W):	up to 71.9
Optional Extras:	

Additional Info
Add notes ...

## Cross-section

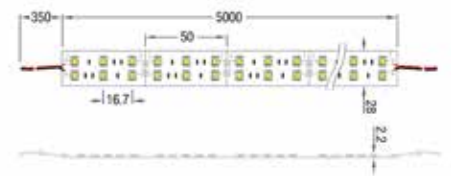

## Photometrics

