

## OPTEFLEX TWINLINE 2

Product Code: OXD2.XX.8XX.XX

### Product description:


Opteflex Twin-line 2 is a 28.8W per metre linear LED that is only 16mm wide, designed for use in mini profiles and other linear aluminium extrusions. It is available in colour temperatures of 2800K or 5000K. Its twin lines of '5050' SMD LEDs supplying 1980 – 2160lm, total 240 per metre. Supplied in 5000mm lengths with 3M adhesive tape fixing, it has cut-points every 50mm to achieve project-specific dimensions. The very latest in LED lighting technology offers 'instant on' and efficient light control.

| Product options  | For exact specifications create a Project Datasheet |
|------------------|---|
| Width (mm):      | 16  |
| Cut-points (mm): | 50  |
| Lifetime:        | 50,000 hrs.   |
| Mounting type:   | Surface Mounted 3M adhesive tape.                   |
| Finish:          |   |
| Emergency:       |   |

| Lighting options         | For exact specifications create a Project Datasheet |
|--------------------------|---|
| Light source:            | Linear SMD LED.                                     |
| Driver:                  | Fixed Output, 0-10V, DALI, DMX, Mains.              |
| Colour temperature:      | 2800K, 5000K.                                       |
| Beam angle:              | 120°  |
| LEDs per metre:          | 240   |
| Operating voltage:       | 24V.  |
| IP Rating:               | IP20  |
| CRI:                     | > 80  |
| Delivered Lumens (lm/M): | 1980 - 2160   |
| Power consumption (W/M): | <b>28.8</b>   |
| Efficiency (lm/W):       | up to 75  |
| Optional Extras:         |   |

| Additional Info |
|-----------------|
| Add notes ...   |

### Cross-section

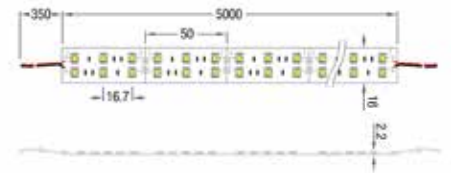

### Photometrics

