



# BLAZE 3

Product Code: BZ03.XX.XXX.XX

## Product description:

Fixed round downlight with 9W and 15W LED versions, finished in White with a 70mmØ stepped trim. Colour temperatures from 2700K to 4000K and beam angles from 20° to 55° to provide project specific solutions. Luminous flux ranges are 640-715lm for 9W and 960-1160lm for 15W, with dimmable driver options available and a CRI of 80+. A durable downlight with a lifetime of 50,000 hours under normal conditions. Luminaire Warranty 5 years, Driver 3 Years.

Use the Project Datasheet generator to get a tailored specification. Additional features include emergency options and RAL finishes on request.


**5 YEAR  
GUARANTEE**

Product options	For exact specifications create a Project Datasheet	
Dimensions (mm):	70 Ø x 76 (9W)	70 Ø x 101.5 (15W)
Cut-out (mm):	60 Ø	
Lifetime:	50,000 hrs.	
Mounting type:	Recessed.	
Finish:	White.	
Emergency:	Standard Integrated.	

Lighting options	For exact specifications create a Project Datasheet	
Light source:	9W LED	15W LED
Driver:	Fixed Output, 0-10V, DALI, L&TE.	
Colour temperature:	2700K, 3000K, 4000K.	
Beam angle:	20°, 40°, 55°.	
Diffuser:		
Operating voltage:	230V.	
IP Rating:	IP20.	
CRI:	>80.	
Delivered Lumens (lm/M):	640-715	960-1160
Power consumption (W/M):	9	15
Efficiency (lm/W):	80	77
Optional Extras:	RAL finishes on request.	

Additional Info
Add notes ...


## Cross-section

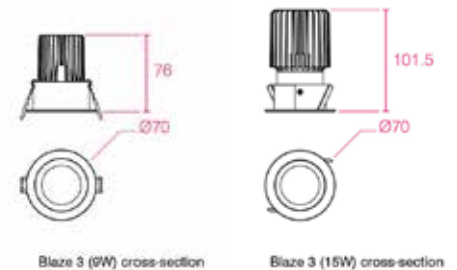

Blaze 3 (9W) cross-section

Blaze 3 (15W) cross-section

## Photometrics

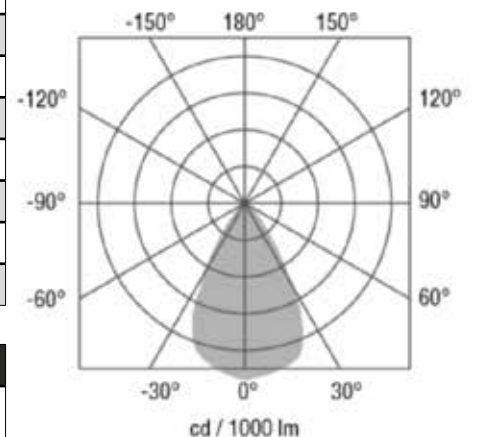

(Curve shown for 3000K with 55° beam angle)  
Blaze 9W polar curve.

