



BLAZE 3

Product Code: BZ03.XX.XXX.XX

Product description:


Fixed round downlight with 9W and 15W LED versions, finished in White with a 70mmØ stepped trim. Colour temperatures from 2700K to 4000K and beam angles from 20° to 55° to provide project specific solutions. Luminous flux ranges are 640-715lm for 9W and 960-1160lm for 15W, with dimmable driver options available and a CRI of 80+. A durable downlight with a lifetime of 50,000 hours under normal conditions. Luminaire Warranty 5 years, Driver 3 Years.

Use the Project Datasheet generator to get a tailored specification. Additional features include emergency options and RAL finishes on request.

5 YEAR
GUARANTEE


| Product options | For exact specifications create a Project Datasheet | |
|------------------|---|--------------------|
| Dimensions (mm): | 70 Ø x 76 (9W) | 70 Ø x 101.5 (15W) |
| Cut-out (mm): | 60 Ø | |
| Lifetime: | 50,000 hrs. | |
| Mounting type: | Recessed. | |
| Finish: | White. | |
| Emergency: | Standard Integrated. | |

Cross-section

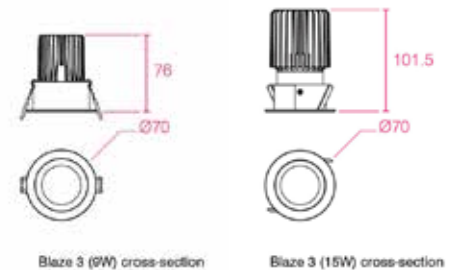

| Lighting options | For exact specifications create a Project Datasheet | |
|--------------------------|---|----------|
| Light source: | 9W LED | 15W LED |
| Driver: | Fixed Output, 0-10V, DALI, L&TE. | |
| Colour temperature: | 2700K, 3000K, 4000K. | |
| Beam angle: | 20°, 40°, 55°. | |
| Diffuser: | | |
| Operating voltage: | 230V. | |
| IP Rating: | IP20. | |
| CRI: | >80. | |
| Delivered Lumens (lm/M): | 640-715 | 960-1160 |
| Power consumption (W/M): | 9 | 15 |
| Efficiency (lm/W): | 80 | 77 |
| Optional Extras: | RAL finishes on request. | |

Photometrics

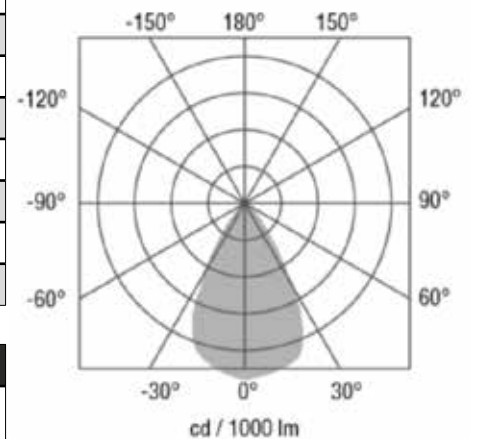

(Curve shown for 3000K with 55° beam angle)
Blaze 9W polar curve.

| Additional Info |
|-----------------|
| Add notes ... |

