



# DARKLIGHT 1

Product Code: DK01.XX.XXX.XX

## Product description:

Fixed downlight with a black anti-glare cowl in 9W and 15W LED versions, finished in White with an 88mmØ trim. Colour temperatures from 2700K to 4000K and beam angles from 15° to 60° to provide project specific solutions. Luminous flux ranges are 345-423lm for 9W and 970-1120lm for 15W, with dimmable driver options available and a CRI of 80+. A durable downlight with a lifetime of 50,000 hours under normal conditions. Luminaire Warranty 5 years, Driver 3 Years.


Use the Project Datasheet generator to get a tailored specification. Additional features include emergency options and RAL finishes on request.

**5 YEAR  
GUARANTEE**


Product options	For exact specifications create a Project Datasheet	
Dimensions (mm):	88 Ø x 83 (9W)	88 Ø x 118 (15W)
Cut-out (mm):	75 Ø	
Lifetime:	50,000 hrs.	
Mounting type:	Recessed.	
Finish:	White.	
Emergency:	Standard Integrated.	

Lighting options	For exact specifications create a Project Datasheet	
Light source:	9W LED	15W LED
Driver:	Fixed Output, 0-10V, L&TE.	
Colour temperature:	2700K, 3000K, 4000K.	
Beam angle:	15°, 24°, 38°, 60°.	20°, 40°, 55°.
Diffuser:		
Operating voltage:	230V.	
IP Rating:	IP20.	
CRI:	>80.	
Delivered Lumens (lm):	345-399	960-1120
Power consumption (W):	9	15
Efficiency (lm/W):	44	75
Optional Extras:	RAL finishes on request.	

## Cross-section

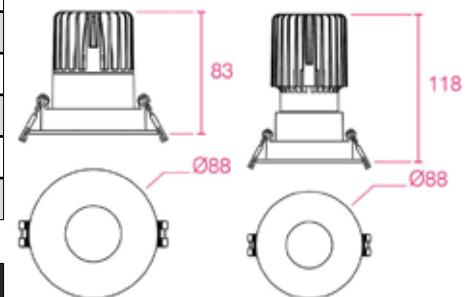

## Photometrics

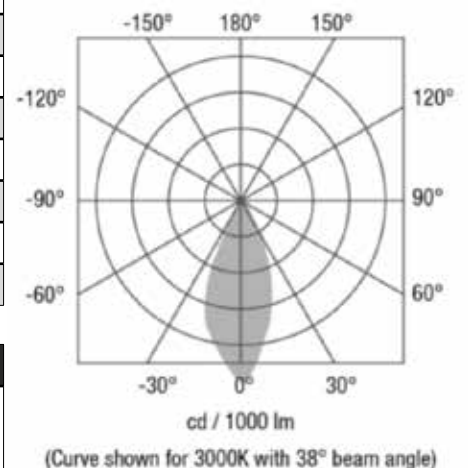

Additional Info
Add notes ...

