


SRIA

WALL LIGHT



KEY FEATURES

- Surface mounted aluminium wall light
- Direct-indirect ambient LED lighting
- A choice of lengths from 600mm to 2060mm
- Colour temperatures from 2200K to 6500K available
- Integrated drivers with various dimming options
- CRI >80 as standard, or CRI >90 on request
- Emergency conversions available on request
- White, Black, Silver, Graphite and Copper finishes



60 YEARS
IN LIGHT

**FOR MORE INFORMATION
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 21/08/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT


SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France


SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

SRIA SPECIFICATIONS

PRODUCT OPTIONS	
Dimensions (mm):	75 (W) x 75 (H) x Various Lengths (see table below)
Lifetime:	50,000 hrs
Mounting type:	Wall Mounted Direct-Indirect
Finish:	White, Black, Silver, Graphite, Copper
Emergency:	Emergency 3-hour battery with indicator LED on request
Operating voltage:	230V
IP Rating:	IP20
Light source:	Medium Power LED, High Power LED
Driver:	Fixed Output, 1-10V, DALI, Touch-Dim, Casambi Control
Colour temperature:	2200K, 2700K, 3000K, 3500K, 4000K, 6500K
Beam Angle:	N/A Direct-Indirect Ambient
Diffuser:	Opal
CRI:	80+ (CRI90+ on request)
Optional Extras:	Alternative finishes, mitred corners, milled slot or lasercut lettering.

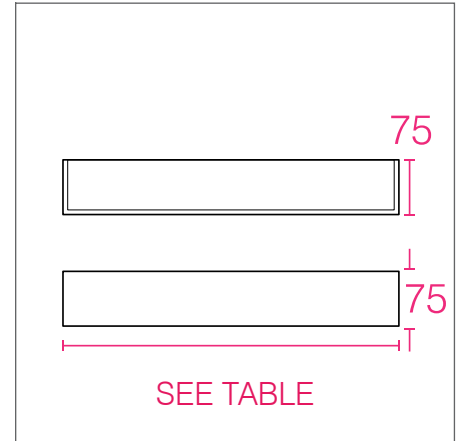

DIMENSIONS (MM)

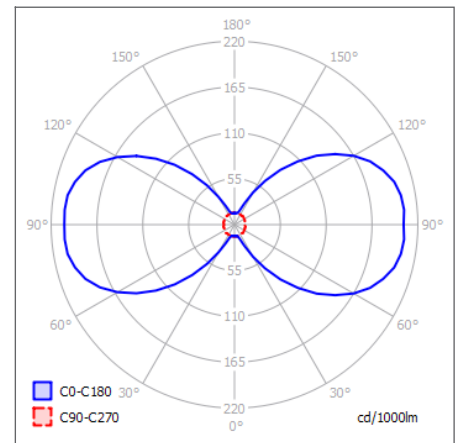

POLAR CURVE 4000K OPAL

SELECT A SIZE AND POWER TO SUIT YOUR PROJECT

Length (mm)	Med. Power Output*	High Power Output*	Weight (kg)
600	2130lm / 20W	2920lm / 27W	2.6 kg
895	3200lm / 28W	4380lm / 39W	3.0 kg
1185	4260lm / 35W	5840lm / 50W	3.5 kg
1478	5320lm / 44W	7300lm / 63W	4.1 kg
1770	6390lm / 52W	8760lm / 75W	4.9 kg
2060	7450lm / 61W	10220lm / 88W	5.5 kg

* Luminaire source lumens at 4000K.



**60 YEARS
IN LIGHT**

FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 21/08/20


HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland


SRIA COMPONENTS



LASERCUT SLOT
Direct laser-cut slot lighting detail.



OUTER CORNER
Mitred 90-degree outer corners.



URBAN GRAPHITE
Powder coated Urban Graphite finish.



LASERCUT LETTERING
Wayfinding/signage solution with laser-cut custom lettering.




SNOW WHITE
Powder coated Snow White finish.




JET BLACK
Powder coated Jet Black finish.



INNER CORNER
Mitred 90-degree inner corners.



SILVER ANODISED
Anodised Silver Aluminium finish.



SATIN COPPER
Powder coated Satin Copper finish.



**60 YEARS
IN LIGHT**

**FOR MORE INFORMATION
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 21/08/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

SRIA SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - HHHH/I								
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F DIR/IND LED	GGG CRI/ COLOUR	HHH LENGTH/ SIZE (mm)	I EMERGENCY
SRIA	WM	B W S G C P X*	F D 1 T C	O	M H	827 830 840 865 927 930 940 965	600 895 1185 1478 1770 2060	E

*	X Custom Options - specify details alongside code
PRODUCT ID	SRIA Sria Wall Light
MOUNTING	WM Wall Mounted Direct-Indirect
FINISH	B Black, W White, S Silver, G Graphite, C Copper, P Polished Aluminium
DRIVER	F Fixed Output, D DALI, 1 1-10V, T Touch Dim, C Casambi control
DIFFUSER	O Opal
DIR/IND LED	M Medium power LED, H High power LED
CRI / COLOUR	827 CRI 80+ Colour 2700K, 830 CRI 80+ Colour 3000K, 840 CRI 80+ Colour 4000K, 865 CRI 80+ Colour 6500K, 927 CRI 90+ Colour 2700K, 930 CRI 90+ Colour 3000K, 940 CRI 90+ Colour 4000K, 965 CRI 90+ Colour 6500K
DIAMETER / SIZE	Size in millimetres
EMERGENCY	E Standard Integrated Emergency

Specify accessories alongside code:

+SLOT Milled Slot, **+LETTERS** Milled Lettering, **+CORNER** Mitred Corners

STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



**60 YEARS
IN LIGHT**

FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 21/08/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland