




# FLUTE BASIC

## DOWNLIGHT



### KEY FEATURES

- Recessed Fixed Downlight with Fluted Round Trim
- Asymmetric or Adjustable versions on request
- Matt White deep recessed trim for reduced glare
- Bridgelux 9W or 15W LED Engines
- CRI 80+ as standard
- 20° Spot, 40° Medium & 55° Flood beam angles
- 2700K, 3000K and 4000K colour temperatures
- Fixed Output, L&TE, 1-10V or DALI Dimming options



**60 YEARS  
IN LIGHT**

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk  
ISSUE DATE: 26/10/20

#### HEAD OFFICE

The Science Park  
Abingdon  
Oxfordshire OX14 3YT  
United Kingdom

#### SHOWROOM

23 Bowling Green Lane  
Clerkenwell  
London EC1R 0BD  
United Kingdom

#### FRANCE

28 Rue Charles  
Baudelaire  
75012 Paris  
France


#### SWITZERLAND

St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland


## FLUTE BASIC DOWNLIGHT SPECIFICATIONS

PRODUCT OPTIONS	
Dimensions (mm):	See table below
Weight (kg):	< 1.0 kg
Lifetime:	50,000 hrs
Mounting type:	Recessed with Trim
Finish:	Trim: Matt White*
Emergency:	Emergency conversion on request
Operating voltage:	230V DC (200 or 450mA)
IP Rating:	IP20
Direct Light source:	Low Power 9W or Medium Power 15W Bridgelux LED
Driver:	Fixed Output, L&TE, 1-10V or DALI
Colour temperature:	2700K, 3000K or 4000K
Beam Angle:	20°, 40°, 55°
Diffuser:	N/A
CRI:	80+
Optional Extras:	Adjustable or Asymmetric versions.

\* Alternative finishes available only on request. Lead times may vary.

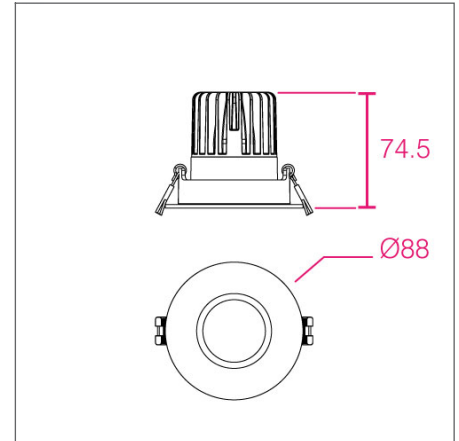


DIMENSIONS 9W FIXED (MM)

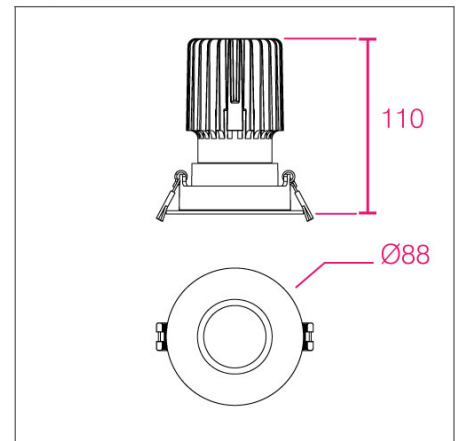

DIMENSIONS 15W FIXED (MM)

### CHOOSE A PROJECT-SPECIFIC POWER AND LUMEN OUTPUT

Product	Dimensions	Colour Temperature	Output
Flute Basic 9W (Low Power)	Ø88 x 74.5 (H) Cut out: Ø75 mm	2700K	650 lm / 9.0 W
		3000K	660 lm / 9.0 W
		4000K	665 lm / 9.0 W
Flute Basic 15W (Medium Power)	Ø88 x 110 (H) Cut out: Ø75 mm	2700K	970 lm / 15.0 W
		3000K	1040 lm / 15.0 W
		4000K	1120 lm / 15.0 W

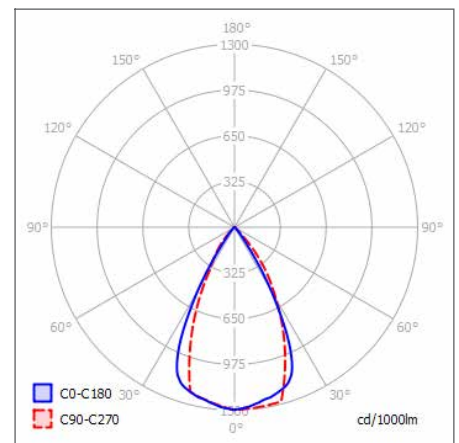

POLAR CURVE 4000K



**60 YEARS  
IN LIGHT**

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk  
ISSUE DATE: 26/10/20

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire OX14 3YT  
United Kingdom

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London EC1R 0BD  
United Kingdom

**FRANCE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWITZERLAND**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland


---

## FLUTE BASIC DOWNLIGHT COMPONENTS

---




**FLUTE 1 FIXED**  
Fixed fluted trim.



**FLUTE 2 ADJUSTABLE**  
Adjustable trim and black bevel on request.



**FLUTE 3 ASYMMETRIC**  
Angled Asymmetric white trim on request.



**9W LED ENGINE**  
with Bridgelux LED chips, CRI 90+.



**15W LED ENGINE**  
with Bridgelux LED chips, CRI 90+.



**PREMIUM DRIVERS**  
Fixed Output, L&TE and DALI drivers.



---

**60 YEARS  
IN LIGHT**

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)  
ISSUE DATE: 26/10/20

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire OX14 3YT  
United Kingdom

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London EC1R 0BD  
United Kingdom

**FRANCE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWITZERLAND**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## FLUTE BASIC DOWNLIGHT SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - HHH/I								
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E BEAM ANGLE	F DIRECT LED	GGG CRI/ COLOUR	HHH DIAMETER/ SIZE (mm)	I EMERGENCY
FLUB	RE	W X*	F L 1 D	S M F	L M	827 830 840	88	N/A

- \* **X** Custom Options - specify details alongside code
- PRODUCT ID **FLUB** Flute Basic Downlight
- MOUNTING **RE** Recessed with Trim
- FINISH **W** Matt White \*Alternative finishes specify details alongside code
- DRIVER **F** Fixed Output, **L** L&TE, **1** 1-10V, **D** DALI
- BEAM ANGLE **S** 20° Spot, **M** 40° Medium, **F** 55° Flood
- DIRECT LED **L** Low power 9W, **M** Medium power 15W
- CRI / COLOUR **827** CRI 80+ Colour 2700K, **830** CRI 80+ Colour 3000K, **840** CRI 80+ Colour 4000K
- DIAMETER / SIZE Luminaire diameter in millimetres
- EMERGENCY N/A

### STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

### MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

### BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



### 60 YEARS IN LIGHT

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk

ISSUE DATE: 26/10/20

#### HEAD OFFICE

The Science Park  
Abingdon  
Oxfordshire OX14 3YT  
United Kingdom

#### SHOWROOM

23 Bowling Green Lane  
Clerkenwell  
London EC1R 0BD  
United Kingdom

#### FRANCE

28 Rue Charles  
Baudelaire  
75012 Paris  
France

#### SWITZERLAND

St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland