




FLUTE

DOWNLIGHT



KEY FEATURES

- Recessed Adjustable (23°) Downlight with Fluted Round Trim
- Black interior bezel for increased glare protection
- Matt White deep recessed fluted trim for reduced glare
- Bridgelux 9W or 15W LED Engines
- High colour rendering - CRI 90+ as standard
- 15° Tight-spot, 24° Spot, 38° Medium & 55° Flood beam angles
- 2700K, 3000K and 4000K colour temperatures
- Fixed Output, Mains Dimming or DALI Dimming options



60 YEARS
IN LIGHT

CALL: +44 (0) 1235 55 37 69

EMAIL: sales@optelma.co.uk

ISSUE DATE: 26/10/20

HEAD OFFICE

The Science Park
Abingdon
Oxfordshire OX14 3YT
United Kingdom

SHOWROOM

23 Bowling Green Lane
Clerkenwell
London EC1R 0BD
United Kingdom

FRANCE

28 Rue Charles
Baudelaire
75012 Paris
France


SWITZERLAND

St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland


FLUTE DOWNLIGHT SPECIFICATIONS

PRODUCT OPTIONS	
Dimensions (mm):	See table below
Weight (kg):	< 1.0 kg
Lifetime:	50,000 hrs
Mounting type:	Recessed with Trim
Finish:	Trim: Matt White* Interior Bezel: Matt Black
Emergency:	Emergency conversion on request
Operating voltage:	230V DC (200 or 350mA)
IP Rating:	IP20
Direct Light source:	Low Power 9W or Medium Power 15W Bridgelux LED
Driver:	Fixed Output, Mains Dim. or DALI Dim.
Colour temperature:	2700K, 3000K or 4000K
Beam Angle:	15°, 24°, 38°, 55°
Diffuser:	N/A
CRI:	CRI 90+
Optional Extras:	Emergency conversions or alternate finishes.

* Alternative finishes available only on request. Lead times may vary.

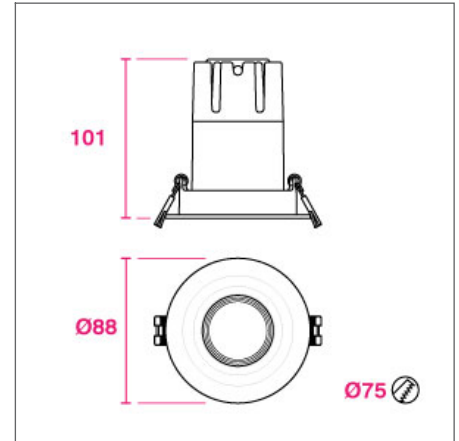


DIMENSIONS 9W ADJUSTABLE (MM)

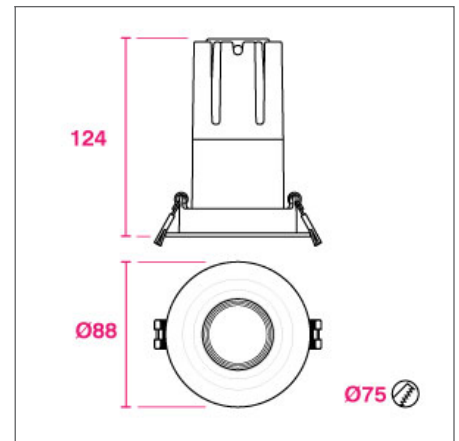

DIMENSIONS 15W ADJUSTABLE (MM)

CHOOSE A PROJECT-SPECIFIC POWER AND LUMEN OUTPUT

Product	Dimensions	Colour Temperature	Output
Flute 9W (Low Power)	Ø88 x 101 (H) Cut out: Ø75 mm	2700K	741 lm / 9.0 W
		3000K	777 lm / 9.0 W
		4000K	804 lm / 9.0 W
Flute 15W (Medium Power)	Ø88 x 124 (H) Cut out: Ø75 mm	2700K	1271 lm / 15.0 W
		3000K	1296 lm / 15.0 W
		4000K	1346 lm / 15.0 W

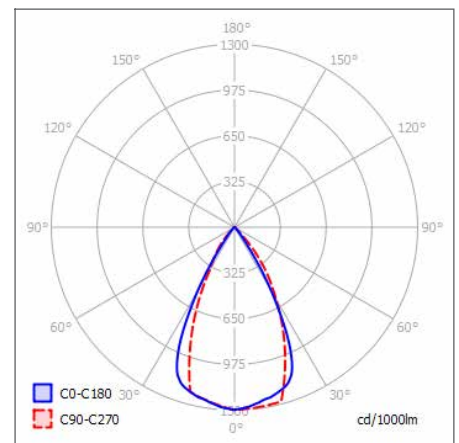

POLAR CURVE 4000K



**60 YEARS
IN LIGHT**

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk
ISSUE DATE: 26/10/20


HEAD OFFICE
The Science Park
Abingdon
Oxfordshire OX14 3YT
United Kingdom

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London EC1R 0BD
United Kingdom

FRANCE
28 Rue Charles
Baudelaire
75012 Paris
France

SWITZERLAND
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland


FLUTE DOWNLIGHT COMPONENTS



**FLUTE
ADJUSTABLE**
Fixed fluted trim.



ANTI-GLARE
Fluted trim and black bevel provides superior glare protection.




DEEP RECESS
Additional glare protection from the deep-recessed light source.



9W LED ENGINE
with Bridgelux LED chips, CRI 90+.



15W LED ENGINE
with Bridgelux LED chips, CRI 90+.



**PREMIUM
DRIVERS**
Fixed Output, L&TE and DALI drivers.



**60 YEARS
IN LIGHT**

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 26/10/20

HEAD OFFICE

The Science Park
Abingdon
Oxfordshire OX14 3YT
United Kingdom

SHOWROOM

23 Bowling Green Lane
Clerkenwell
London EC1R 0BD
United Kingdom

FRANCE

28 Rue Charles
Baudelaire
75012 Paris
France

SWITZERLAND

St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

FLUTE DOWNLIGHT SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - HHH/I								
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E BEAM ANGLE	F DIRECT LED	GGG CRI/ COLOUR	HHH DIAMETER/ SIZE (mm)	I EMERGENCY
FLUT	RE	W X*	F M D	T S M F	L M	927 930 940	88	N/A

- * **X** Custom Options - specify details alongside code
- PRODUCT ID **FLUT** Flute Downlight
- MOUNTING **RE** Recessed with Trim
- FINISH **W** Matt White *Alternative finishes specify details alongside code
- DRIVER **F** Fixed Output, **M** Mains Dimmable, **D** DALI
- BEAM ANGLE **T** 15° Tight-spot, **S** 24° Spot, **M** 38° Medium, **F** 55° Flood
- DIRECT LED **L** Low power 9W, **M** Medium power 15W
- CRI / COLOUR **927** CRI 90+ Colour 2700K, **930** CRI 90+ Colour 3000K, **940** CRI 90+ Colour 4000K
- DIAMETER / SIZE Luminaire diameter in millimetres
- EMERGENCY N/A

STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



60 YEARS IN LIGHT

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk
ISSUE DATE: 26/10/20

HEAD OFFICE

The Science Park
Abingdon
Oxfordshire OX14 3YT
United Kingdom

SHOWROOM

23 Bowling Green Lane
Clerkenwell
London EC1R 0BD
United Kingdom

FRANCE

28 Rue Charles
Baudelaire
75012 Paris
France

SWITZERLAND

St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland