




CIRCUS ULTRA SLIM+

PENDANT LIGHT



KEY FEATURES

- Suspended by parallel wires or to a central ceiling rose
- 8 different sizes ranging from 600mm to 3500mm diameters
- Direct-Indirect lighting in 2700K, 3000K or 4000K colour temperatures, with more on request
- A range of dimming/control options including Fixed Output, 1-10V, DALI, Touch-Dim or Casambi control
- CRI >80 as standard, with >90 on request
- High Efficiency Medium Power LED with Opal diffuser
- White, Black, Silver, Graphite, Copper and Champagne finish



CASAMBI

**60 YEARS
IN LIGHT**

FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 09/12/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

CIRCUS ULTRA SLIM+ DIRECT-INDIRECT SPECIFICATIONS


PRODUCT OPTIONS	
Dimensions (mm):	38 (W) x 55 (H) x Various Diameters (below)
Cut-out (mm):	N/A
Lifetime:	50,000 hrs
Mounting type:	Suspended Parallel, Suspended Central
Finish:	White, Black, Silver, Graphite, Copper, Champagne
Emergency:	N/A
Operating voltage:	230V
IP Rating:	IP20
Light source:	Medium Power LED
Driver:	Fixed Output, 1-10V, DALI*, Touch Dim, Casambi control
Colour temperature:	2200K, 2700K, 3000K, 3500K, 4000K, 6500K
Beam Angle:	N/A
Diffuser:	Opal
CRI:	CRI80, CRI90
Optional Extras:	Custom finishes on request

* Separately dimmable direct-indirect DALI driver option on request.


■ CHOOSE A SIZE TO MATCH YOUR PROJECT

Diameter /Size	Medium Power Dir./Ind. Opal*
600	4920lm/43W
900	7900lm/70W
1200	9990lm/84W
1500	13100lm/117W
2000	16470lm/142W
2500	21280lm/190W
3000	25600lm/227W
3500	29640lm/268W

* Luminaire luminous flux with 4000K LED. Diameter/Size in millimetres

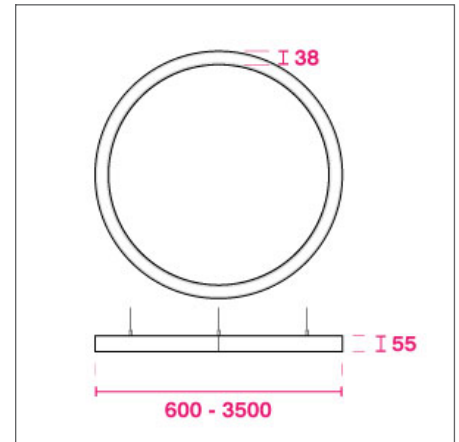

SUSPENDED DIMENSIONS (MM)

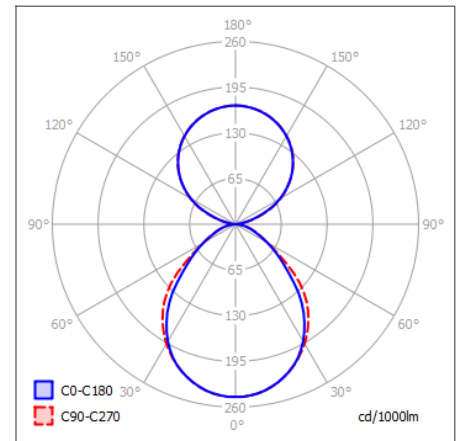

POLAR CURVE 4000K OPAL



FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk
ISSUE DATE: 09/12/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland


CIRCUS ULTRA SLIM+ DIRECT-INDIRECT COMPONENTS



MATT WHITE
Powder-coated Matt
White painted finish.



GRAPHITE
Powder-coated
graphite finish.




**CENTRAL
SUSPENSION**
Stainless steel cable,
Max height 4000mm.
Only available for
sizes 600 - 2000mm.



MATT BLACK
Powder-coated Matt
Black painted finish.



CHAMPAGNE
Powder-coated
champagne finish.



**PARALLEL
SUSPENSION**
Stainless steel cable,
Max height 4000mm.



MATT SILVER
Powder-coated Matt
Silver painted finish.



COPPER
Powder-coated
copper finish.



OPAL DIFFUSER
Opal polycarbonate
diffuser.



CASAMBI

**60 YEARS
IN LIGHT**

**FOR MORE INFORMATION
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 09/12/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

CIRCUS ULTRA SLIM+ DIRECT-INDIRECT SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - F/GGG - HHHH/I										
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F DIRECT LED	GGG CRI / COLOUR	F INDIRECT LED	GGG CRI / COLOUR	HHH DIAMETER / SIZE (mm)	I EMERGENCY
CIRC (ULTRA- SLIM)	SC SP	B W S G H C X*	F D 1 T C	O	M	827 830 840	M	827 830 840	0600 0900 1200 1500 2000 2500 3000 3500	E

* PRODUCT ID	X Custom Options - specify details alongside code
MOUNTING	CIRC (ULTRA-SLIM) Circus Ultra Slim Pendant
FINISH	SC Suspended Central, SP Suspended Parallel
DRIVER	B Black, W White, S Silver, G Graphite, H Champagne Silver, C Satin Copper
DIFFUSER	F Fixed Output, D DALI, 1 1-10V, T Touch Dim, C Casambi control
DIRECT LED	O Opal
INDIRECT LED	M Medium power LED
CRI / COLOUR	827 CRI 80+ Colour 2700K, 830 CRI 80+ Colour 3000K, 840 CRI 80+ Colour 4000K
CRI / COLOUR	M Medium power LED
DIAMETER / SIZE	827 CRI 80+ Colour 2700K, 830 CRI 80+ Colour 3000K, 840 CRI 80+ Colour 4000K
EMERGENCY	Diameter/Size in millimetres
	E Standard Integrated Emergency - specify details alongside code

+Direct-Indirect separately controlled DALI - specify alongside code

STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



CASAMBI

**60 YEARS
IN LIGHT**

FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 09/12/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland