




LENI

PENDANT/CEILING LIGHT



KEY FEATURES

- Surface mounted, Wall mounted and Suspended (Parallel wires) flat rectangular panel luminaires
- 300mm wide in 900mm, 1200mm or 1500mm lengths
- Direct lighting in 2700K, 3000K or 4000K colour temperatures
- A range of dimming/control options including Fixed Output, 1-10V, DALI, Touch-Dim or Casambi control
- High quality CRI 80+ or CRI 90+ LEDs
- Integrated 3 hour emergency conversions available
- White, Black, Silver, Graphite, Champagne and Polished finish



CASAMBI

**60 YEARS
IN LIGHT**

**FOR MORE INFORMATION
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 07/01/21

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

LENI DIRECT SPECIFICATIONS

PRODUCT OPTIONS	
Dimensions (mm):	Suspended: 25 (H) x 300 (W) x Various Lengths (below) Surface Mounted: 50 (H) x 300 (W) x Various Lengths (below)
Cut-out (mm):	N/A
Lifetime:	50,000 hrs
Mounting type:	Surface mounted, Wall mounted, Suspended Parallel
Finish:	Black, White, Silver, Graphite, Champagne, Polished Aluminium
Emergency:	Standard 3 hour emergency conversion
Operating voltage:	230V
IP Rating:	IP20
Light source:	Medium Power LED, High Power LED
Driver:	Fixed Output, 1-10V, DALI, Touch Dim, Casambi control
Colour temperature:	2200K, 2700K, 3000K, 3500K, 4000K, 6500K
Beam Angle:	N/A
Diffuser:	Opal, MPO
CRI:	CRI80, CRI90
Optional Extras:	Integrated sensors, custom finishes and more on request


* Surface Mounted version can be Ceiling or Wall mounted.

■ CHOOSE A SIZE TO SUIT YOUR PROJECT


Surface / Wall	Medium Power Direct Opal*	High Power Direct Opal*	Medium Power Direct MPO*	High Power Direct MPO*
900	2950lm/26W	4200lm/37W	3230lm/26W	4610lm/37W
1200	4360lm/33W	6190lm/48W	4460lm/33W	6320lm/48W
1500	5260lm/41W	7480lm/59W	5680lm/41W	8090lm/59W

Susp. Pendant	Medium Power Direct Opal*	High Power Direct Opal*	Medium Power Direct MPO*	High Power Direct MPO*
900	2950lm/26W	4200lm/37W	3230lm/26W	4610lm/37W
1200	4360lm/33W	6190lm/48W	4460lm/33W	6320lm/48W
1500	5260lm/41W	7480lm/59W	5680lm/41W	8090lm/59W


* Luminaire luminous flux at 4000K LED.

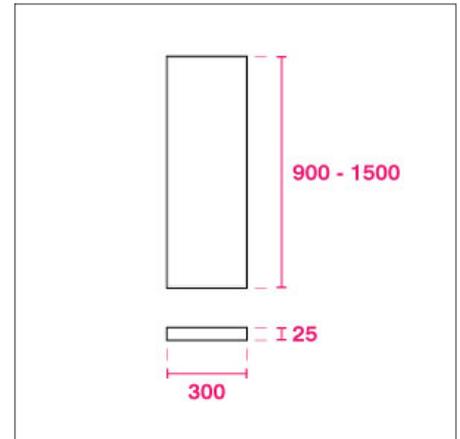

SUSPENDED DIMENSIONS (MM)

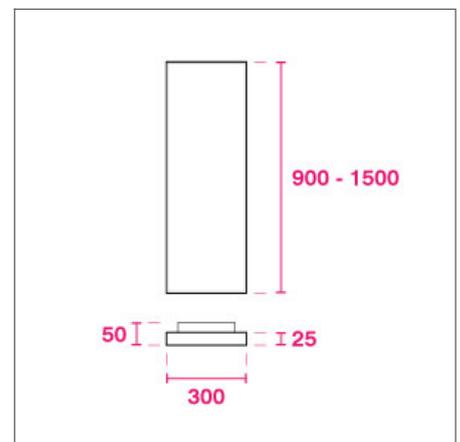

SURFACE DIMENSIONS (MM)

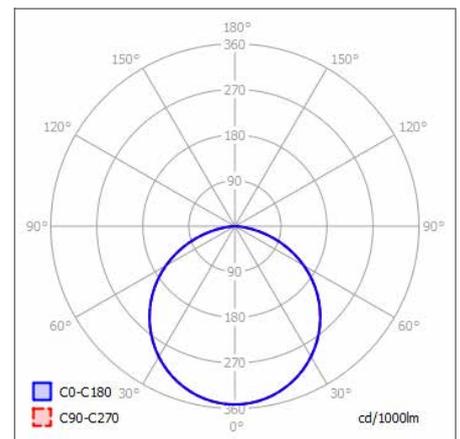

POLAR CURVE 4000K OPAL



CASAMBI

**60 YEARS
IN LIGHT**

FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk
ISSUE DATE: 07/01/21

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland


LENI DIRECT COMPONENTS



MATT WHITE
Powder-coated Matt
White painted finish.



GRAPHITE
Powder-coated
graphite finish.



**PARALLEL
SUSPENSION**
Stainless steel cable,
Max height 1500mm.




MULTISENSOR
Integrated sensor for
daylight and motion
control.



MATT BLACK
Powder-coated Matt
Black painted finish.




CHAMPAGNE
Powder-coated
champagne finish.



MPO DIFFUSER
Microprismatic
diffuser for glare
control.



EMERGENCY
Integrated module
with indicator LED
and 3-hour battery.



MATT SILVER
Powder-coated Matt
Silver painted finish.



POLISHED
Polished Aluminium
reflective finish.



OPAL DIFFUSER
Satin opal diffuser
for homogeneous
efficient lighting.



**FOR MORE INFORMATION
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 07/01/21

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

LENI DIRECT SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - HHHH/I								
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F DIRECT LED	GGG CRI / COLOUR	HHH DIAMETER / SIZE (mm)	I EMERGENCY
LENI	SM WM SP	B W S G C P X*	F D 1 T C	O M	M H	827 830 840 927 930 940	0900 1200 1500	E

- * **X** Custom Options - specify details alongside code
- PRODUCT ID **'LENI'** LENI Direct Ceiling Light
- MOUNTING **'SM'** Surface Mounted, **'WM'** Wall Mounted, **'SP'** Suspended Parallel
- FINISH **'B'** Black, **'W'** White, **'S'** Silver, **'G'** Graphite, **'C'** Champagne Silver, **'P'** Polished Aluminium
- DRIVER **'F'** Fixed Output, **'D'** DALI, **'1'** 1-10V, **'T'** Touch Dim, **'C'** Casambi control
- DIFFUSER **'O'** Opal, **'M'** MPO
- DIRECT LED **'M'** Medium power LED, **'H'** High power LED
- DIRECT LED CRI / COLOUR **'827'** CRI 80+ Colour 2700K, **'830'** CRI 80+ Colour 3000K, **'840'** CRI 80+ Colour 4000K
'927' CRI 90+ Colour 2700K, **'930'** CRI 90+ Colour 3000K, **'940'** CRI 90+ Colour 4000K
 Diameter/Size in millimetres
- DIAMETER / SIZE
- EMERGENCY **'E'** Standard Integrated Emergency - specify details alongside code
- + **'MSENS'** Multisensor - specify alongside code

STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



CASAMBI

**60 YEARS
IN LIGHT**

FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
 EMAIL: sales@optelma.co.uk

ISSUE DATE: 07/01/21

HEAD OFFICE
 The Science Park
 Abingdon
 Oxfordshire
 OX14 3YT

SHOWROOM
 23 Bowling Green Lane
 Clerkenwell
 London
 EC1R 0BD

PARIS OFFICE
 28 Rue Charles
 Baudelaire
 75012 Paris
 France

SWISS OFFICE
 St. Urbangasse 53
 Postfach 1738
 CH-4502 Solothurn
 Switzerland