




# LENI+

PENDANT/CEILING LIGHT



## KEY FEATURES

- Surface mounted, Wall mounted and Suspended (Parallel wires) flat rectangular panel luminaires
- 300mm wide in 900mm, 1200mm or 1500mm lengths
- Direct-Indirect lighting in 2700K, 3000K or 4000K CCT
- A range of dimming/control options including Fixed Output, 1-10V, DALI, Touch-Dim or Casambi control
- High quality CRI 80+ or CRI 90+ LEDs
- Integrated 3 hour emergency conversions available
- White, Black, Silver, Graphite, Champagne and Polished finish



**CASAMBI**

**60 YEARS  
IN LIGHT**

**FOR MORE INFORMATION  
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 11/01/21

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## LENI+ DIRECT-INDIRECT SPECIFICATIONS

PRODUCT OPTIONS	
Dimensions (mm):	Suspended: 25 (H) x 300 (W) x Various Lengths (below) Surface Mounted: 50 (H) x 300 (W) x Various Lengths (below)
Cut-out (mm):	N/A
Lifetime:	50,000 hrs
Mounting type:	Surface mounted, Wall mounted, Suspended Parallel
Finish:	Black, White, Silver, Graphite, Champagne, Polished Aluminium
Emergency:	Standard 3 hour emergency conversion
Operating voltage:	230V
IP Rating:	IP20
Light source:	Direct-Indirect Medium Power LED, Direct-Indirect High Power LED
Driver:	Fixed Output, 1-10V, DALI, Touch Dim, Casambi control
Colour temperature:	2200K, 2700K, 3000K, 3500K, 4000K, 6500K
Beam Angle:	N/A
Diffuser:	Opal, MPO
CRI:	CRI80, CRI90
Optional Extras:	Integrated sensors, custom finishes and more on request


\* Surface Mounted version can be Ceiling or Wall mounted.

### ■ CHOOSE A SIZE TO SUIT YOUR PROJECT


Surface / Wall	Medium Power Dir./Ind. Opal*	High Power Dir./Ind. Opal*	Medium Power Dir./Ind. MPO*	High Power Direct MPO*
900	4670lm/41W	6290lm/56W	4950lm/41W	6700lm/56W
1200	6650lm/53W	8980lm/73W	6750lm/53W	9110lm/73W
1500	8120lm/65W	10970lm/90W	8540lm/65W	11580lm/90W

Susp. Pendant	Medium Power Dir./Ind. Opal*	High Power Dir./Ind. Opal*	Medium Power Dir./Ind. MPO*	High Power Dir./Ind. MPO*
900	4670lm/41W	6290lm/56W	4950lm/41W	6700lm/56W
1200	6650lm/53W	8980lm/73W	6750lm/53W	9110lm/73W
1500	8120lm/65W	10970lm/90W	8540lm/65W	11580lm/90W


\* Luminaire luminous flux at 4000K LED.

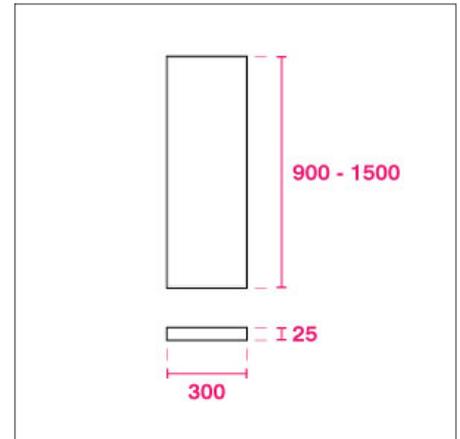

SUSPENDED DIMENSIONS (MM)

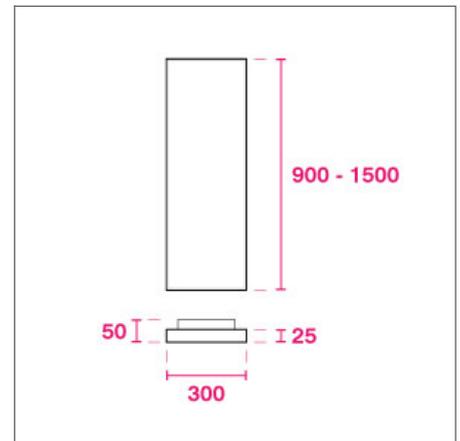

SURFACE DIMENSIONS (MM)

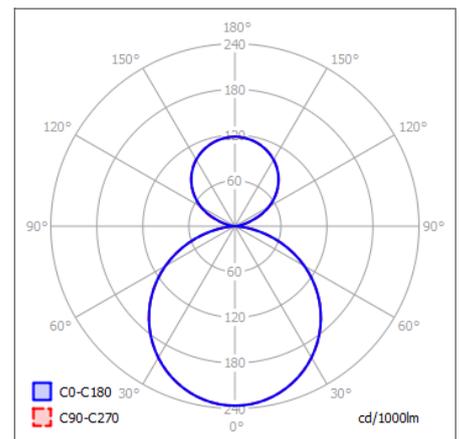

POLAR CURVE 4000K OPAL



**CASAMBI**

**60 YEARS  
IN LIGHT**

#### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk  
ISSUE DATE: 11/01/21

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland


**LENI+ DIRECT-INDIRECT COMPONENTS**



**MATT WHITE**  
Powder-coated Matt  
White painted finish.



**GRAPHITE**  
Powder-coated  
graphite finish.



**PARALLEL  
SUSPENSION**  
Stainless steel cable,  
Max height 1500mm.




**MULTISENSOR**  
Integrated sensor for  
daylight and motion  
control.



**MATT BLACK**  
Powder-coated Matt  
Black painted finish.



**CHAMPAGNE**  
Powder-coated  
champagne finish.



**MPO DIFFUSER**  
Microprismatic  
diffuser for glare  
control.



**EMERGENCY**  
Integrated module  
with indicator LED  
and 3-hour battery.



**MATT SILVER**  
Powder-coated Matt  
Silver painted finish.



**POLISHED**  
Polished Aluminium  
reflective finish.



**OPAL DIFFUSER**  
Satin opal diffuser  
for homogeneous  
efficient lighting.



**FOR MORE INFORMATION  
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 11/01/21

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## LENI+ DIRECT-INDIRECT SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - F/GGG - HHHH/I										
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F DIRECT LED	GGG CRI / COLOUR	F INDIRECT LED	GGG CRI / COLOUR	HHH LENGTH / SIZE (mm)	I EMERGENCY
LENI	SM WM SP	B W S G C P X*	F D 1 T C	O M	M H	827 830 840 927 930 940	M H	827 830 840 927 930 940	0900 1200 1500	E

\* **X** Custom Options - specify details alongside code

PRODUCT ID **LENI** LENI Direct-Indirect Ceiling Light

MOUNTING **SM** Surface Mounted, **WM** Wall Mounted, **SP** Suspended Parallel

FINISH **B** Black, **W** White, **S** Silver, **G** Graphite, **C** Champagne Silver, **P** Polished Aluminium

DRIVER **F** Fixed Output, **D** DALI, **1** 1-10V, **T** Touch Dim, **C** Casambi control

DIFFUSER **O** Opal, **M** MPO

DIRECT LED **M** Medium power LED, **H** High power LED

CRI / COLOUR **827** CRI 80+ Colour 2700K, **830** CRI 80+ Colour 3000K, **840** CRI 80+ Colour 4000K  
**927** CRI 90+ Colour 2700K, **930** CRI 90+ Colour 3000K, **940** CRI 90+ Colour 4000K

INDIRECT LED **M** Medium power LED, **H** High power LED

CRI / COLOUR **827** CRI 80+ Colour 2700K, **830** CRI 80+ Colour 3000K, **840** CRI 80+ Colour 4000K  
**927** CRI 90+ Colour 2700K, **930** CRI 90+ Colour 3000K, **940** CRI 90+ Colour 4000K

LENGTH Length/Size in millimetres

EMERGENCY **E** Standard Integrated Emergency - specify details alongside code

+ **MSENS** Multisensor - specify alongside code

### STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

### MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

### BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



**CASAMBI**

**60 YEARS  
IN LIGHT**

#### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
 EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/01/21

**HEAD OFFICE**  
 The Science Park  
 Abingdon  
 Oxfordshire  
 OX14 3YT

**SHOWROOM**  
 23 Bowling Green Lane  
 Clerkenwell  
 London  
 EC1R 0BD

**PARIS OFFICE**  
 28 Rue Charles  
 Baudelaire  
 75012 Paris  
 France

**SWISS OFFICE**  
 St. Urbangasse 53  
 Postfach 1738  
 CH-4502 Solothurn  
 Switzerland