




LENI SLIM+

PENDANT/CEILING LIGHT



KEY FEATURES

- Surface mounted, Wall mounted and Suspended (Parallel wires) flat rectangular panel luminaires
- 200mm wide in 900mm, 1200mm or 1500mm lengths
- Direct-Indirect lighting in 2700K, 3000K or 4000K CCT, or Indirect-only uplighter version
- A range of dimming/control options including Fixed Output, 1-10V, DALI, Touch-Dim or Casambi control
- High quality CRI 80+ or CRI 90+ LEDs
- Integrated 3 hour emergency conversions available
- White, Black, Silver, Graphite, Champagne and Polished finish



CASAMBI

**60 YEARS
IN LIGHT**

**FOR MORE INFORMATION
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/01/21

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

LENI SLIM+ DIRECT-INDIRECT SPECIFICATIONS

PRODUCT OPTIONS	
Dimensions (mm):	Suspended: 25 (H) x 200 (W) x Various Lengths (below) Surface Mounted: 50 (H) x 200 (W) x Various Lengths (below)
Cut-out (mm):	N/A
Lifetime:	50,000 hrs
Mounting type:	Surface mounted, Wall mounted, Suspended Parallel
Finish:	Black, White, Silver, Graphite, Champagne, Polished Aluminium
Emergency:	Standard 3 hour emergency conversion
Operating voltage:	230V
IP Rating:	IP20
Light source:	Direct-Indirect Medium Power LED, Direct-Indirect High Power LED
Driver:	Fixed Output, 1-10V, DALI, Touch Dim, Casambi control
Colour temperature:	2200K, 2700K, 3000K, 3500K, 4000K, 6500K
Beam Angle:	N/A
Diffuser:	Opal, MPO
CRI:	CRI80, CRI90
Optional Extras:	Integrated sensors, custom finishes and more on request

* Surface Mounted version can be Ceiling or Wall mounted. Indirect only version available.


CHOOSE A SIZE TO SUIT YOUR PROJECT

Surface / Wall	Medium Power Dir./Ind. Opal*	High Power Dir./Ind. Opal*	Medium Power Dir./Ind. MPO*	High Power Direct MPO*
900	3780lm/33W	4730lm/42W	3990lm/33W	5010lm/42W
1200	5000lm/43W	6240lm/55W	5170lm/43W	6490lm/55W
1500	6110lm/53W	7630lm/68W	6400lm/53W	8000lm/68W


Susp. Pendant	Medium Power Dir./Ind. Opal*	High Power Dir./Ind. Opal*	Medium Power Dir./Ind. MPO*	High Power Dir./Ind. MPO*
900	3780lm/33W	4730lm/42W	3990lm/33W	5010lm/42W
1200	5000lm/43W	6240lm/55W	5170lm/43W	6490lm/55W
1500	6110lm/53W	7630lm/68W	6400lm/53W	8000lm/68W

Susp. Indirect	Medium Power Indirect Optic*	High Power Direct Opal*
900	4300lm/32W	5570lm/43W
1200	5730lm/41W	7430lm/55W
1500	7170lm/50W	9280lm/67W
1800	8600lm/59W	11140lm/79W
2100	10030lm/73W	12990lm/98W


* Luminaire luminous flux at 4000K LED.

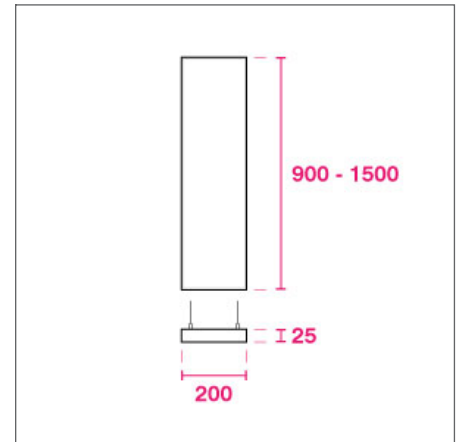

SUSPENDED DIMENSIONS (MM)

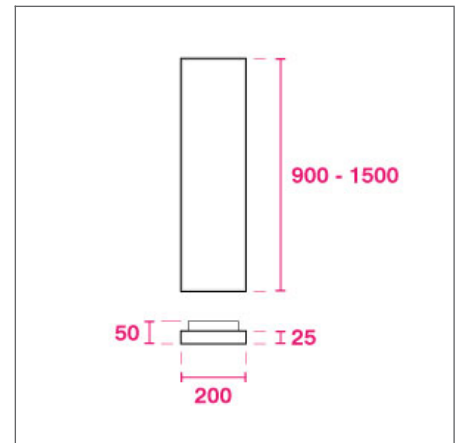

SURFACE DIMENSIONS (MM)

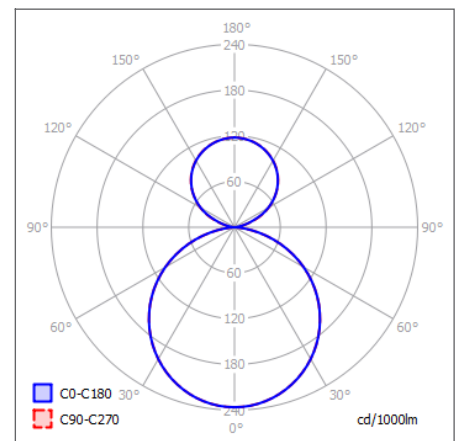

POLAR CURVE 4000K OPAL



**60 YEARS
IN LIGHT**

FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69

EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/01/21

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD


PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland


LENI SLIM+ DIRECT-INDIRECT COMPONENTS



MATT WHITE
Powder-coated Matt
White painted finish.



GRAPHITE
Powder-coated
graphite finish.



**PARALLEL
SUSPENSION**
Stainless steel cable,
Max height 1500mm.




MULTISENSOR
Integrated sensor for
daylight and motion
control.



MATT BLACK
Powder-coated Matt
Black painted finish.



CHAMPAGNE
Powder-coated
champagne finish.



MPO DIFFUSER
Microprismatic
diffuser for glare
control.



EMERGENCY
Integrated module
with indicator LED
and 3-hour battery.



MATT SILVER
Powder-coated Matt
Silver painted finish.



POLISHED
Polished Aluminium
reflective finish.



OPAL DIFFUSER
Satin opal diffuser
for homogeneous
efficient lighting.



**FOR MORE INFORMATION
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/01/21

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

LENI SLIM+ DIRECT-INDIRECT SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - F/GGG - HHHH/I										
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F DIRECT LED	GGG CRI / COLOUR	F INDIRECT LED	GGG CRI / COLOUR	HHH LENGTH / SIZE (mm)	I EMERGENCY
LENI (SLIM)	SM WM SP	B	F	O	M	827	M	827	0900	E
		W	D	M	H	830	H	830	1200	
		S	1			840		840	1500	
		G	T			927		927	1800	
		C	C			930		930	2100	
		P				940		940		
X*										

* **X** Custom Options - specify details alongside code

PRODUCT ID **LENI (SLIM)** LENI SLIM Direct-Indirect Ceiling Light

MOUNTING **SM** Surface Mounted, **WM** Wall Mounted, **SP** Suspended Parallel

FINISH **B** Black, **W** White, **S** Silver, **G** Graphite, **C** Champagne Silver, **P** Polished Aluminium

DRIVER **F** Fixed Output, **D** DALI, **1** 1-10V, **T** Touch Dim, **C** Casambi control

DIFFUSER **O** Opal, **M** MPO

DIRECT LED **M** Medium power LED, **H** High power LED - (Leave blank for direct only version)

CRI / COLOUR **827** CRI 80+ Colour 2700K, **830** CRI 80+ Colour 3000K, **840** CRI 80+ Colour 4000K
927 CRI 90+ Colour 2700K, **930** CRI 90+ Colour 3000K, **940** CRI 90+ Colour 4000K

INDIRECT LED **M** Medium power LED, **H** High power LED

CRI / COLOUR **827** CRI 80+ Colour 2700K, **830** CRI 80+ Colour 3000K, **840** CRI 80+ Colour 4000K
927 CRI 90+ Colour 2700K, **930** CRI 90+ Colour 3000K, **940** CRI 90+ Colour 4000K

LENGTH Length/Size in millimetres

EMERGENCY **E** Standard Integrated Emergency - specify details alongside code

+ **MSENS** Multisensor, **IND** Indirect Only version - specify alongside code

STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



CASAMBI

**60 YEARS
IN LIGHT**

FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
 EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/01/21

HEAD OFFICE
 The Science Park
 Abingdon
 Oxfordshire
 OX14 3YT

SHOWROOM
 23 Bowling Green Lane
 Clerkenwell
 London
 EC1R 0BD

PARIS OFFICE
 28 Rue Charles
 Baudelaire
 75012 Paris
 France

SWISS OFFICE
 St. Urbangasse 53
 Postfach 1738
 CH-4502 Solothurn
 Switzerland