



# LENI SYSTEM

PENDANT/CEILING LIGHT



## KEY FEATURES

- Suspended (Parallel wires) connecting panel luminaire system
- 200mm wide in 900mm, 1200mm or 1500mm lengths, with 600x600mm corner modules
- Direct-Indirect lighting in 2700K, 3000K or 4000K CCT, or Indirect-only uplighter version
- A range of dimming/control options including Fixed Output, 1-10V, DALI, Touch-Dim or Casambi control
- High quality CRI 80+ or CRI 90+ LEDs
- Integrated 3 hour emergency conversions available
- White, Black, Silver, Graphite, Champagne and Polished finish



**CASAMBI**

**60 YEARS  
IN LIGHT**

**FOR MORE INFORMATION  
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 11/01/21

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD


**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland


## LENI SYSTEM SPECIFICATIONS

PRODUCT OPTIONS	
Dimensions (mm):	Suspended: 25 (H) x 200 (W) x Various Lengths (below)
Cut-out (mm):	N/A
Lifetime:	50,000 hrs
Mounting type:	Suspended Parallel*
Finish:	Black, White, Silver, Graphite, Champagne, Polished Aluminium
Emergency:	Standard 3 hour emergency conversion
Operating voltage:	230V
IP Rating:	IP20
Light source:	Medium Power LED, High Power LED (Direct only or Direct-Indirect)
Driver:	Fixed Output, 1-10V, DALI, Touch Dim, Casambi control
Colour temperature:	2700K, 3000K, 3500K, 4000K
Beam Angle:	N/A - Direct only or Direct-Indirect
Diffuser:	Opal, MPO
CRI:	CRI80, CRI90
Optional Extras:	Integrated sensors, custom finishes and more on request

\* 4-cord parallel suspension, or Y-cord on request.

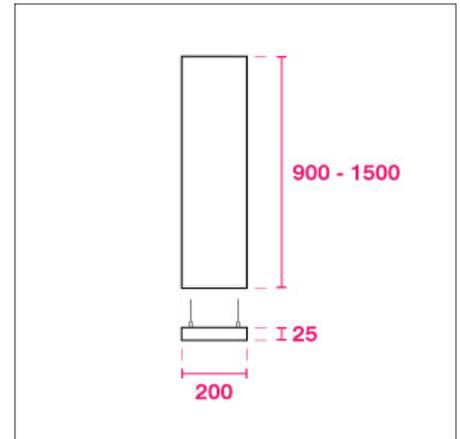

SUSPENDED DIMENSIONS (MM)

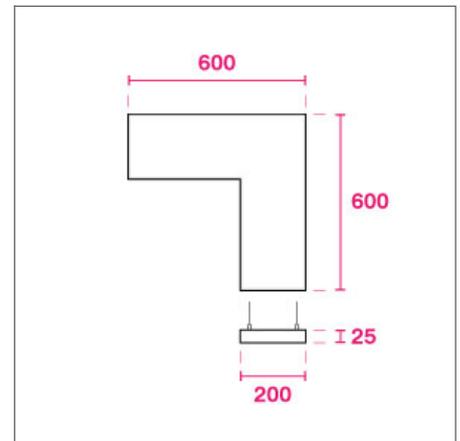


SURFACE DIMENSIONS (MM)

### CONNECT YOUR MODULAR LENGTHS AND CORNERS FROM THE LIST BELOW

Susp. Pendant	Medium Power Direct Opal*	High Power Direct Opal*	Medium Power Direct MPO*	High Power Direct MPO*
900	2120lm/19W	2710lm/26W	2330lm/19W	2990lm/26W
1200	2790lm/26W	3550lm/33W	2960lm/26W	3800lm/33W
1500	3350lm/32W	4260lm/41W	3640lm/32W	4630lm/41W
600x600	2360lm/22W	2980lm/29W	2410lm/22W	3060lm/29W

Susp. Pendant	Medium Power Dir./Ind. Opal*	High Power Dir./Ind. Opal*	Medium Power Dir./Ind. MPO*	High Power Dir./Ind. MPO*
900	3780lm/33W	4730lm/42W	3990lm/33W	5010lm/42W
1200	5000lm/43W	6240lm/55W	5170lm/43W	6490lm/55W
1500	6110lm/53W	7630lm/68W	6400lm/53W	8000lm/68W
600x600	4010lm/35W	5030lm/45W	4070lm/35W	5110lm/45W

\* Luminaire luminous flux at 4000K LED. Connectors available, see components list.

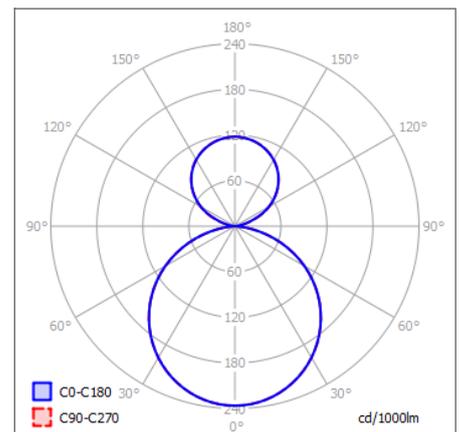

POLAR CURVE 4000K OPAL DIRECT-INDIRECT



**CASAMBI**

**60 YEARS  
IN LIGHT**

#### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69

EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/01/21

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD


**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland


## LENI SYSTEM COMPONENTS



**MATT WHITE**  
Powder-coated Matt White painted finish.




**GRAPHITE**  
Powder-coated graphite finish.




**PARALLEL SUSPENSION**  
Stainless steel cable, Max height 1500mm.



**MULTISENSOR**  
Integrated sensor for daylight and motion control.




**FLUSH CONNECTOR**  
Edge-to-edge straight connector with suspension. Specify [SPA1]




**500MM STRAIGHT CONNECTOR**  
Straight connector with suspension and 500mm spacing. Specify [SPA4]



**MATT BLACK**  
Powder-coated Matt Black painted finish.



**CHAMPAGNE**  
Powder-coated champagne finish.




**MPO DIFFUSER**  
Microprismatic diffuser for glare control.



**EMERGENCY**  
Integrated module with indicator LED and 3-hour battery.



**20MM STRAIGHT CONNECTOR**  
Straight connector with suspension and 20mm spacing. Specify [SPA2]



**90° CORNER CONNECTOR**  
Corner connector 170x170mm spacing at 90° angle. Specify [SPA5]



**MATT SILVER**  
Powder-coated Matt Silver painted finish.



**POLISHED**  
Polished Aluminium reflective finish.



**OPAL DIFFUSER**  
Satin opal diffuser for homogeneous efficient lighting.



**CEILING ROSE / CANOPY**  
Ceiling rose junction box with power supply cable.



**300MM STRAIGHT CONNECTOR**  
Straight connector with suspension and 300mm spacing. Specify [SPA3]



**CASAMBI**

**60 YEARS  
IN LIGHT**

**FOR MORE INFORMATION  
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 11/01/21

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## LENI SYSTEM SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - F/GGG - HHHH/I										
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F DIRECT LED	GGG CRI / COLOUR	F INDIRECT LED	GGG CRI / COLOUR	HHH LENGTH / SIZE (mm)	I EMERGENCY
LENI (SYSTEM)	SP	B W S G C P X*	F D 1 T C	O M	M H	827 830 840 927 930 940	M H	827 830 840 927 930 940	0900 1200 1500 0600	E

\* **X** Custom Options - specify details alongside code

PRODUCT ID **LENI (SYSTEM)** LENI SYSTEM Ceiling Light

MOUNTING **SP** Suspended Parallel

FINISH **B** Black, **W** White, **S** Silver, **G** Graphite, **C** Champagne Silver, **P** Polished Aluminium

DRIVER **F** Fixed Output, **D** DALI, **1** 1-10V, **T** Touch Dim, **C** Casambi control

DIFFUSER **O** Opal, **M** MPO

DIRECT LED **M** Medium power LED, **H** High power LED - (Leave blank for direct only version)

CRI / COLOUR **827** CRI 80+ Colour 2700K, **830** CRI 80+ Colour 3000K, **840** CRI 80+ Colour 4000K  
**927** CRI 90+ Colour 2700K, **930** CRI 90+ Colour 3000K, **940** CRI 90+ Colour 4000K

INDIRECT LED **M** Medium power LED, **H** High power LED

CRI / COLOUR **827** CRI 80+ Colour 2700K, **830** CRI 80+ Colour 3000K, **840** CRI 80+ Colour 4000K  
**927** CRI 90+ Colour 2700K, **930** CRI 90+ Colour 3000K, **940** CRI 90+ Colour 4000K

LENGTH Length/Size in millimetres

EMERGENCY **E** Standard Integrated Emergency - specify details alongside code

+ **MSENS** Multisensor, **90°** Corner module, **SPA1** Spacer modules (1 - 5) - specify alongside code

### STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

### MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

### BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



**CASAMBI**

**60 YEARS  
IN LIGHT**

#### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
 EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/01/21

**HEAD OFFICE**  
 The Science Park  
 Abingdon  
 Oxfordshire  
 OX14 3YT

**SHOWROOM**  
 23 Bowling Green Lane  
 Clerkenwell  
 London  
 EC1R 0BD

**PARIS OFFICE**  
 28 Rue Charles  
 Baudelaire  
 75012 Paris  
 France

**SWISS OFFICE**  
 St. Urbangasse 53  
 Postfach 1738  
 CH-4502 Solothurn  
 Switzerland