


# COUPOLE

## CEILING LIGHT



### KEY FEATURES

- Indirect glare-free lighting in a recessed plaster dome
- Sculpted decorative versions in period or contemporary style
- High strength reinforced natural gypsum plaster from France
- Indirect lighting in a range of colour temperatures and colours
- A range of dimming/control options including Fixed Output, 1-10V, DALI, Push-Dim or Casambi control
- High quality CRI 90+ LEDs
- Natural plaster finish can be painted on-site



atelier sedap **CASAMBI**

**60 YEARS  
IN LIGHT**

CALL: +44 (0) 1235 55 37 69

EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 18/01/21

#### HEAD OFFICE

The Science Park  
Abingdon  
Oxfordshire OX14 3YT  
United Kingdom

#### SHOWROOM

23 Bowling Green Lane  
Clerkenwell  
London EC1R 0BD  
United Kingdom

#### FRANCE


28 Rue Charles  
Baudelaire  
75012 Paris  
France

#### SWITZERLAND

St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## COUPOLE SPECIFICATIONS

PRODUCT OPTIONS	
Dimensions (mm):	300 - 1500 (Ø) x 75 - 210 (D)
Cut-out (mm):	595x595 - 1675x1675 (W)
Weight (kg):	4.0 - 40.0 kg
Lifetime:	50,000 hrs
Mounting type:	Recessed Plaster-in
Finish:	Natural Plaster
Emergency:	N/A (Separate Emergency lighting products available on request)
Operating voltage:	24V
IP Rating:	IP20
Light source:	Opteflex Medium Power 14.4W/M LED Opteflex High Power 19.2W/M LED
Driver:	Fixed Output, DALI, 0-10V, Mains Dimmable, Casambi control*
Colour temperature:	2700K, 3000K, 4000K, 6500K
Beam Angle:	N/A (INDIRECT)
Diffuser:	N/A (INDIRECT)
CRI:	CRI 90+
Optional Extras:	Alternative finishes and surface styles on request

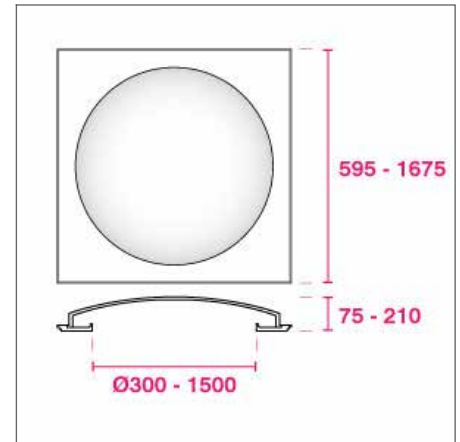

TIQAL ROUND DIMENSIONS (MM)




DECORATIVE STYLE VERSION

### CHOOSE A PROJECT-SPECIFIC SIZE AND LED OUTPUT

Diameter (mm)	Source Lumens	Wattage	Cut-out (mm)	Weight (kg)
300 (1200mm heatsink)	1620 lm 2652 lm	18 W 24 W	595 sq. x 75	4.0
420 (1600mm heatsink)	2160 lm 3536 lm	24 W 31 W	595 sq. x 95	5.4
600 (2150mm heatsink)	2902 lm 4752 lm	40 W 50 W	785 sq. x 100	6.0
750 (2600mm heatsink)	3510 lm 5746 lm	40 W 50 W	925 sq. x 165	12.5
1000 (3400mm heatsink)	4590 lm 7514 lm	51 W 66 W	1175 sq. x 210	19.0
1500 (4950mm heatsink)	6683 lm 10940 lm	75 W 96 W	1675 sq. x 210	40.0

\* Opteflex Medium or High Power 4000K LED Source lumens. Alternate LED options on request.

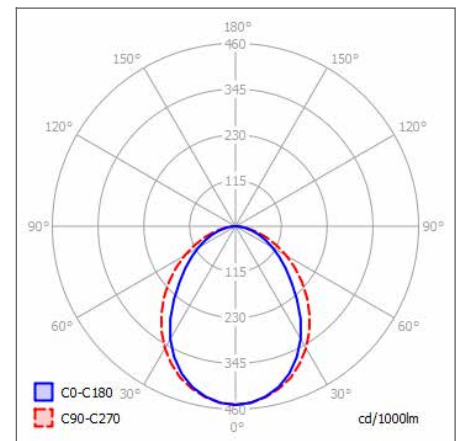

POLAR CURVE 4000K COB LED



atelier sedap **CASAMBI**

**60 YEARS  
IN LIGHT**

CALL: +44 (0) 1235 55 37 69

EMAIL: sales@optelma.co.uk

ISSUE DATE: 18/01/21

#### HEAD OFFICE

The Science Park  
Abingdon  
Oxfordshire OX14 3YT  
United Kingdom

#### SHOWROOM

23 Bowling Green Lane  
Clerkenwell  
London EC1R 0BD  
United Kingdom

#### FRANCE

28 Rue Charles  
Baudelaire  
75012 Paris  
France

#### SWITZERLAND

St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

**COUPOLE COMPONENTS**



**NATURAL PLASTER**

Made from high-strength plaster.



**'RIVOLI' COUPOLE**

Classic decorative interior design with sculpted border.



**'STYLE' COUPOLE**

Periodic decorative interior designs.



**RECESSED PLASTER-IN**

Recessed, screwed to a frame and skimmed to provide seamless integration..



**'ORIGAMI' COUPOLE**

Geometric decorative interior design.



**BESPOKE SIZES**

Bespoke sizes on request.



**'GOUTTE' COUPOLE**

Rippled decorative interior design.



atelier sedap **CASAMBI**

**60 YEARS  
IN LIGHT**

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk

ISSUE DATE: 18/01/21

**HEAD OFFICE**

The Science Park  
Abingdon  
Oxfordshire OX14 3YT  
United Kingdom

**SHOWROOM**

23 Bowling Green Lane  
Clerkenwell  
London EC1R 0BD  
United Kingdom

**FRANCE**

28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWITZERLAND**

St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## COUPOLE SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - HHHH/I								
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F INDIRECT LED	GGG CRI / COLOUR	HHHH DIAMETER / SIZE (mm)	I EMERGENCY
COUP	PI	P	F D O M C	N	M H	927 930 940 965	300 420 600 740 1000 1500	N/A

- \* **X** Custom Options - specify details alongside code
- PRODUCT ID **COUP** Coupole Plaster Light
  - MOUNTING **PI** Plaster-in Recessed
  - FINISH **P** Natural Plaster
  - DRIVER **F** Fixed Output, **D** DALI, **O** 0-10V Dimming, **M** Mains Dim, **C** Casambi
  - DIFFUSER **N** None (N/A)
  - INDIRECT LED **M** Opteflex Medium Power LED, **H** Opteflex High Power LED
  - CRI / COLOUR **927** CRI 90+ Colour 2700K, **930** CRI 90+ Colour 3000K, **940** CRI 90+ Colour 4000K, **965** CRI 90+ Colour 6500K,
  - DIAMETER / SIZE Size in millimetres
  - EMERGENCY No emergency options available

### STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

### MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

### BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



atelier sedap **CASAMBI**

**60 YEARS  
IN LIGHT**

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk  
ISSUE DATE: 18/01/21

#### HEAD OFFICE

The Science Park  
Abingdon  
Oxfordshire OX14 3YT  
United Kingdom

#### SHOWROOM

23 Bowling Green Lane  
Clerkenwell  
London EC1R 0BD  
United Kingdom

#### FRANCE

28 Rue Charles  
Baudelaire  
75012 Paris  
France

#### SWITZERLAND

St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland