





## BELLA +

PENDANT/CEILING LIGHT



### KEY FEATURES

- Suspended Parallel or Suspended Central mounting
- 5 different sizes ranging from 600mm to 2000mm diameters
- Direct-Indirect lighting with a choice of 2700K, 3000K or 4000K colour temperatures
- A range of dimming/control options including Fixed Output, 1-10V, DALI, Touch-Dim and Casambi control
- CRI >80 as standard, with CRI >90 on request
- Integrated 3 hour emergency conversions available
- Matt White, Matt Black and Matt Silver finishes

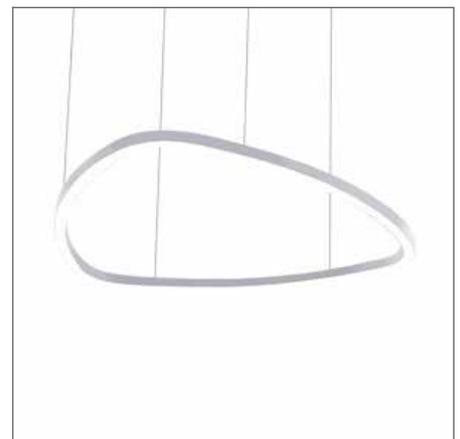

**CASAMBI**

**60 YEARS  
IN LIGHT**

**FOR MORE INFORMATION  
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 11/02/21

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT


**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France


**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## BELLA+ SPECIFICATIONS

PRODUCT OPTIONS	
Dimensions (mm):	100 (W) x 84 (H) x Various Diameters (below)
Cut-out (mm):	N/A
Lifetime:	50,000 hrs
Mounting type:	Suspended Parallel, Suspended Central
Finish:	Matt White, Matt Black, Matt Silver
Emergency:	DALI or Standard 3 hour emergency conversion
Operating voltage:	230V
IP Rating:	IP20
Light source:	Direct: Medium Power LED, Indirect: Opteline LED Board
Driver:	Fixed Output, 1-10V, DALI, Touch Dim, Casambi Control
Colour temperature:	2700K, 3000K, 4000K
Beam Angle:	N/A
Diffuser:	Opal, MPO
CRI:	>80
Optional Extras:	Tuneable White or RGBW lighting on request

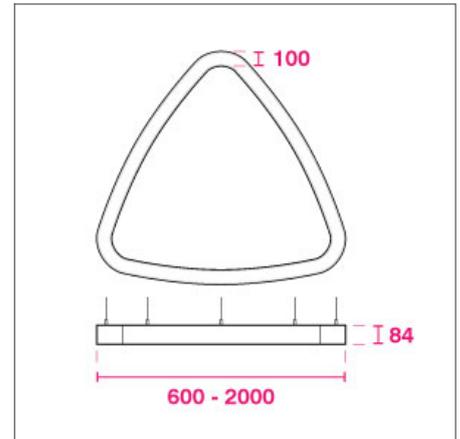

CROSS-SECTION DIMENSIONS (MM)

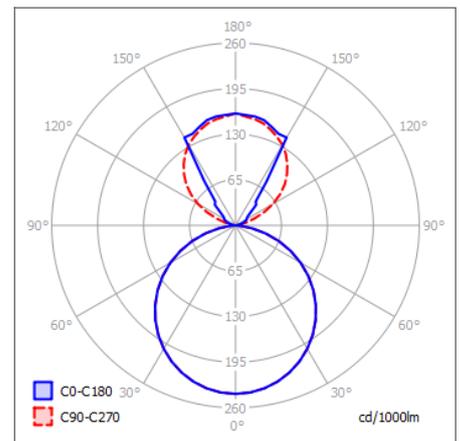

POLAR CURVE 4000K OPAL

### CHOOSE A SIZE TO MATCH YOUR PROJECT

Diameter (mm)	DIRECT OPAL *	INDIRECT OPAL *	Weight (kg)
600	2925 lm / 21 W	2221 lm / 27 W	13.6 kg
900	4387 lm / 32 W	3331 lm / 41 W	14.9 kg
1200	5850 lm / 43 W	4442 lm / 55 W	17.3 kg
1500	7312 lm / 54 W	5553 lm / 68 W	17.8 kg
2000	9750 lm / 72 W	7404 lm / 91 W	19.2 kg

\* Luminaire luminous flux at 4000K, Direct Opal (LOR 65%), Indirect Opal (LOR 78%).



**CASAMBI**

**60 YEARS  
IN LIGHT**

#### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/02/21


**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

**BELLA+ COMPONENTS**

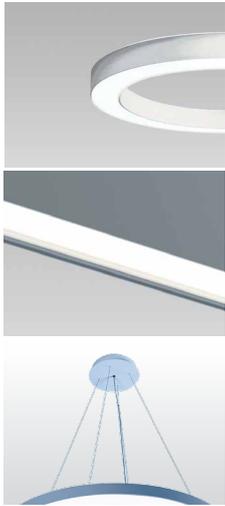

**MATT WHITE**  
Powder-coated Matt  
White RAL 9016  
painted finish.

**OPAL DIFFUSER**  
Opal polycarbonate  
diffuser.

**CENTRAL  
SUSPENSION**  
Stainless steel cable,  
Max height 4000mm.  
Only available for  
sizes 600 - 2000mm.



**MATT BLACK**  
Powder-coated Matt  
Black RAL 9005  
painted finish.

**MPO DIFFUSER**  
Micro Pyramidal  
Optic diffuser.

**PARALLEL  
SUSPENSION**  
Stainless steel cable,  
Max height 4000mm.



**MATT SILVER**  
Powder-coated Matt  
Silver RAL 9006  
painted finish.

**RGBW DIRECT  
LIGHTING**  
Colour lighting  
options available.



**CASAMBI**

**60 YEARS  
IN LIGHT**

**FOR MORE INFORMATION  
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 11/02/21

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## BELLA+ SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - F/GGG - HHHH/I										
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F DIRECT LED	GGG CRI / COLOUR	F INDIRECT LED	GGG CRI / COLOUR	HHHH DIAMETER / SIZE (mm)	I EMERGENCY
BE06	SC	B	F	O	M	827	0	827	0600	E
BE09	SP	W	D	M		830		830	0900	DE
BE12		S	1			840		840	1200	
BE15		X*	T						1500	
BE20			C						2000	

\* **X** Custom Options - specify details alongside code

PRODUCT ID **'BE06'** Bella 600, **'BE09'** Bella 900, **'BE12'** Bella 1200, **'BE15'** Bella 1500, **'BE20'** Bella 2000,

MOUNTING **'SC'** Suspended Central, **'SP'** Suspended Parallel

FINISH **'B'** Matt Black, **'W'** Matt White, **'S'** Matt Silver

DRIVER **'F'** Fixed Output, **'D'** DALI, **'1'** 1-10V, **'T'** Touch Dim, **'C'** Casambi Control

DIFFUSER **'O'** Opal, **'M'** MPO

DIRECT LED **'M'** Medium power LED

CRI / COLOUR **'827'** CRI 80+ Colour 2700K, **'830'** CRI 80+ Colour 3000K, **'840'** CRI 80+ Colour 4000K

DIRECT LED **'O'** Opteline LED Board

CRI / COLOUR **'827'** CRI 80+ Colour 2700K, **'830'** CRI 80+ Colour 3000K, **'840'** CRI 80+ Colour 4000K

DIAMETER / SIZE Diameter/Size in millimetres

EMERGENCY **'E'** Standard Integrated Emergency, **'DE'** DALI Integrated Emergency, - specify details alongside code

### STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

### MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

### BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



**CASAMBI**

**60 YEARS  
IN LIGHT**

#### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/02/21

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland