




# SLOT XL

## WALL LIGHT



### KEY FEATURES

- Inset linear slots for low-level lighting
- Recessed plaster-in mounting for seamless integration
- 60mm wide slots in five different heights
- High strength reinforced plaster
- Integrated constant current or constant voltage LEDs
- Warm White 2700K Colour Temperature
- Fixed Output or Dimmable (DALI / 1-10V) power supplies
- Perfect for stair lighting or decorative hallway lighting
- Natural plaster finish is paintable to match wall finish



**60 YEARS**  
**IN LIGHT**

#### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 17/12/20

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD


**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland


## SLOT XL SPECIFICATIONS

PRODUCT OPTIONS	
Dimensions (mm):	60 (W) x 85 - 600mm (H) (see table below)
Cut-out (mm):	160 (W) x 245 - 780 (H) x 50mm (D) (see table below)
Weight:	1kg to 3.3kg (see table below)
Lifetime:	50,000 hrs
Mounting type:	Wall Mounted (Plaster-in Recessed)
Finish:	Natural Plaster*
Emergency:	N/A
Operating voltage:	Constant Voltage 24V, or Constant Current 350mA/500mA
IP Rating:	IP20
Light source:	Magnetised High Power LED
Source Lumens:	218 lm (24V), 264 lm (350mA), 320 lm (500mA)
Delivered Lumens:	218 lm (24V), 264 lm (350mA), 320 lm (500mA)
Power:	2 W (24V), 2W (350mA), 3W (500mA)
Efficiency:	109 lm/W
Driver:	Fixed Output, DALI or 1-10V Dimmable
Colour temperature:	2700K (4000K on request)
Beam Angle:	N/A
Diffuser:	N/A
CRI:	CRI 80
Optional Extras:	

\* Can be painted on-site to match finish of wall

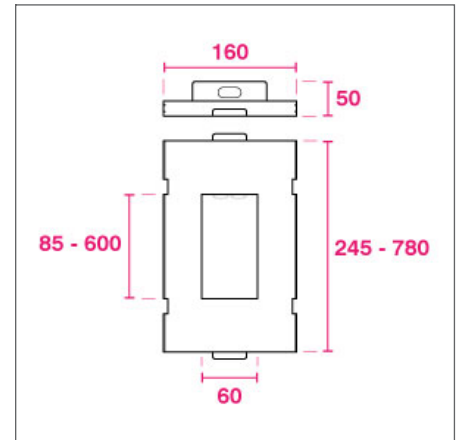

SLOT XL DIMENSIONS (MM)

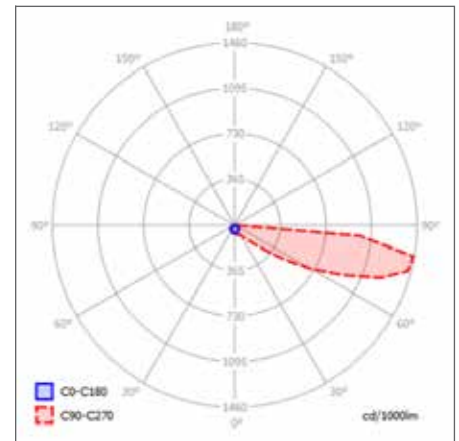

POLAR CURVE INTEGRATED LED (2700K)

### CHOOSE A PROJECT-SPECIFIC SLOT SIZE

Slot Size (mm)	Output*	Cut-out (mm)	Weight (kg)
60 (W) x 85 (H)	320 lm 3 W (500mA)	160 (W) x 245 (H)	1.0
60 (W) x 170 (H)	320 lm 3 W (500mA)	160 (W) x 330 (H)	1.6
60 (W) x 250 (H)	320 lm 3 W (500mA)	160 (W) x 410 (H)	2.0
60 (W) x 400 (H)	320 lm 3 W (500mA)	160 (W) x 560 (H)	2.0
60 (W) x 600 (H)	320 lm 3 W (500mA)	160 (W) x 780 (H)	3.3

\* Constant Current 500mA 4000K LED Source lumens.



**60 YEARS  
IN LIGHT**

#### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk

ISSUE DATE: 17/12/20

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

---

## SLOT XL COMPONENTS

---



**NATURAL  
PLASTER**

Made from high-strength plaster.



**RECESSED  
PLASTER-IN**

Recessed, screwed to a frame and skimmed to provide seamless integration..



**INTEGRATED LED**

Magnetised High Power LED source.



**60 YEARS  
IN LIGHT**

---

**FOR MORE INFORMATION  
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 17/12/20

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## SLOT XL SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - F/GGG - HHHH/I								
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F DIRECT LED	GGG CRI / COLOUR	HHH LENGTH / SIZE (mm)	I EMERGENCY
SLOT	PI	P	F D 1	N	V C	827	0085 0170 0250 0400 0600	

- \* **X'** Custom Options - specify details alongside code
- PRODUCT ID **SLOT'** Slot XL Wall Light
- MOUNTING **PI'** Plaster-in Recessed (Wall)
- FINISH **P'** Natural Plaster
- DRIVER **F'** Fixed Output, **D'** DALI Dimmable, **1'** 1-10V Dimmable
- DIFFUSER **N'** None
- DIRECT LED **V'** High Power Constant Voltage LED, **C'** High Power Constant Current LED
- CRI / COLOUR **827'** CRI 80+ Colour 2700K
- LENGTH / SIZE Length/Size (/height) in millimetres
- EMERGENCY N/A
  
- + **350mA'** Constant Current, **500mA'** Constant Current - specify alongside code for driver settings

### STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

### MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

### BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



**60 YEARS  
IN LIGHT**

#### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk

ISSUE DATE: 17/12/20

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland