


QUAD W


WALL MOUNTED

OPTELMA
ARCHITECTURAL LIGHTING

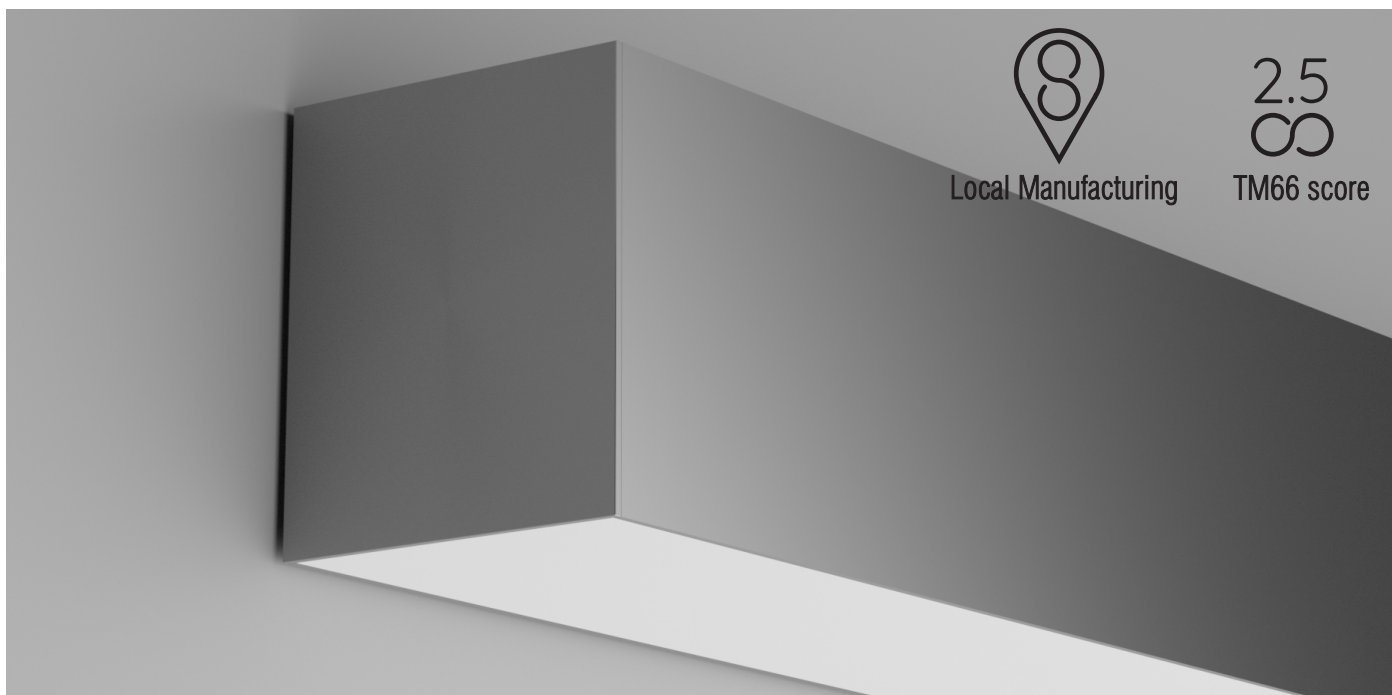

QUAD S SPECIFICATION OPTIONS

Dimensions (mm):	60mm Wide x 85mm Tall
Mounting:	Wall Mounted
Weight (kg):	2Kg
Finish:	Anodised Aluminium, RAL 9003 Fine Texture, RAL 9005 Fine Texture
Emergency:	DALI or Standard 3 hour emergency conversion (30% driver output)
Operating voltage:	230v
Driver:	DALI, Switching, Casambi
Colour temperature:	2700K, 3000K, 3500K, 4000K, 5400K,
CRI:	Min 90CRI
TM30:	TBC
Direct light options:	Opal, MPO, Optics, Wall Wash, Dark diffuser
Lumen options:	500lm/m, 1000lm/m, 1500lm/m 2000lm/m
Efficacy:	130lm/w
Lifetime:	100,000 hrs

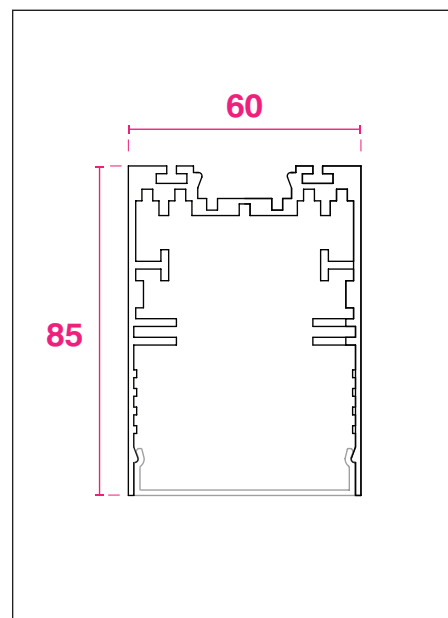

	500lm/m	1000lm/m	1500lm/m	2000lm/m
Opal	3.5w	7.2w	10.8w	15w
MPO	3.9w	7.7w	11.6w	15.5w

CCT 4000k

Wattage and delivered lumen output for direct and indirect sources

FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69

EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/09/20

HEAD OFFICE

The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM

23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE

28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE

St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

QUAD W

WALL MOUNTED

direct light

'O' Opal - made with bioplastics
Creates a soft even distribution of light

'M' MPO - made with bioplastics
For maximum visual comfort and UGR 19

'W' Asymmetric Wallwasher
Dedicated straight edge wall washer, create a uniform panel of light

'L' Lens Louver
Available in 30°, 50° and 80° beams with a UGR19

'D' Dark - made with bioplastics
Perfect for visual comfort in an off state in dark environments

**FOR MORE INFORMATION
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/09/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

indirect light

40° 60° and 110° wide beams

symmetrical wallwash

asymmetrical wallwash

batwing

diffuse

**FOR MORE INFORMATION
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/09/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

QUAD W

WALL MOUNTED

SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - HHHH/I								
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F DIRECT LED	GGG CRI / COLOUR	HHHH LENGTH (mm)	I EMERGENCY
QW	RE SM SP	B W S X*	F D 1 T C	O M W L	SL L M H	927 930 940	XXXX* LENGTH IN MM	E

MOUNTING 'SM' Surface Mounted, 'SP' Suspended, 'WA' Wall Mounted, 'TM' Recessed Trim, 'RP' Recessed Plaster-in
FINISH 'B' Black, 'W' White, 'S' Silver 'X' Custom
DRIVER 'F' Fixed Output, 'D' DALI, '1' 1-10V, 'T' Touch Dim, 'C' Casambi control
DIFFUSER 'O' Opal, 'M' MPO, 'W' Asymmetric Wallwasher, 'L' Lens Louver 'D' Dark diffuser
DIRECT LED 'SL' 500 Lm/m Low power, 'L' 1000Lm/m Low power, 'M' 1500Lm/m High power, 'H' 2000Lm/m High power
CRI / COLOUR '927' CRI 90+ Colour 2700K, '930' CRI 90+ Colour 3000K, '940' CRI 90+ Colour 4000K
LENGTH 500mm, 1000mm, 1500mm, 2000mm, 2500mm standard modular lengths in millimetres
EMERGENCY 'E' Integrated Emergency - specify details alongside code

LIFETIME DATA

L70		L80		L90	
B10	B50	B10	B50	B10	B50
>100,000 Hrs	>100,000 Hrs	>80,000 Hrs	>90,000 Hrs	>40,000 Hrs	>40,000 Hrs



FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/09/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland