



COVE LIGHT

RECESSED

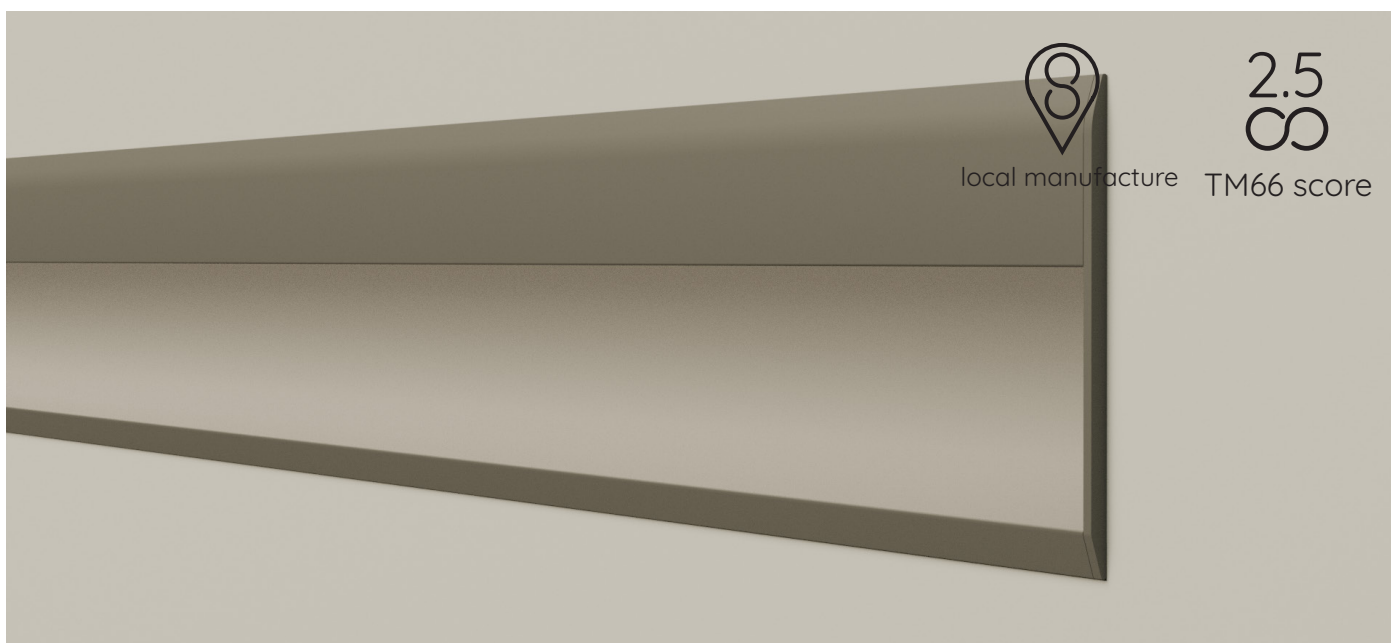

SPECIFICATION OPTIONS

Dimensions (mm):	23mm Deep x 41.5mm Tall
Mounting:	Surface Mounted / Recessed trim
Weight (kg):	< 500g
Finish:	Anodised Aluminium, RAL 9003 Fine Texture, RAL 9005 Fine Texture
Emergency:	DALI or Standard 3 hour emergency conversion (300lm output)
Operating voltage:	24VDC
Driver:	DALI, Switching, Casambi
Colour temperature:	2700K, 3000K, 3500K, 4000K, 5400K,
CRI:	Min 90CRI
TM30:	TBC
Lumen options:	500Lm/m, 1000Lm/m, 1500Lm/m 2000Lm/m
Efficacy:	130Lm/w
Lifetime:	100,000 hrs

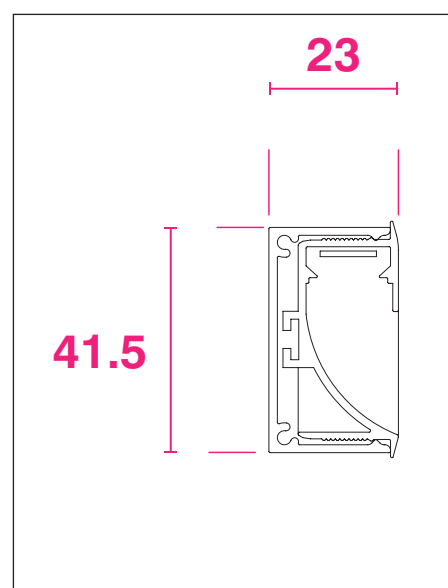

WATTAGE

	500Lm/m	1000Lm/m	1500Lm/m	2000Lm/m
	4.8W	9.6W	14.4W	19.2W

CCT 4000K Wattage and delivered lumen output for direct and indirect light sources

FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69

EMAIL: sales@optelma.co.uk

ISSUE DATE: 100424

HEAD OFFICE

19 Nuffield Way
Abingdon
OX14 1RL
United Kingdom

SHOWROOM

23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE

28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE

St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

COVE LIGHT

RECESSED



SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - HHHH/I							
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	F DIRECT LED	GGG CRI / COLOUR	HHH LENGTH (mm)	I EMERGENCY
CL	SM TM	B W S X*	F D 1 T C	SL L M H	927 930 940	XXXX* LENGTH IN MM	E

MOUNTING **'SM'** Surface Mounted, **'TM'** Recessed Trim,
FINISH **'B'** Black, **'W'** White, **'S'** Silver **'X'** Custom
DRIVER **'F'** Fixed Output, **'D'** DALI, **'1'** 1-10V, **'T'** Touch Dim, **'C'** Casambi control
DIRECT LED **'SL'** 500 Lm/m Low power, **'L'** 1000Lm/m Low power, **'M'** 1500Lm/m High power, **'H'** 2000Lm/m High power
CRI / COLOUR **'927'** CRI 90+ Colour 2700K, **'930'** CRI 90+ Colour 3000K, **'940'** CRI 90+ Colour 4000K
LENGTH Length in mm
EMERGENCY **'E'** Integrated Emergency - specify details alongside code

LIFETIME DATA

L70		L80		L90	
B10	B50	B10	B50	B10	B50
>100,000 Hrs	>100,000 Hrs	>80,000 Hrs	>90,000 Hrs	>40,000 Hrs	>40,000 Hrs



FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
 EMAIL: sales@optelma.co.uk

ISSUE DATE: 100424

HEAD OFFICE

19 Nuffield Way
 Abingdon
 OX14 1RL
 United Kingdom

SHOWROOM

23 Bowling Green Lane
 Clerkenwell
 London
 EC1R 0BD

PARIS OFFICE

28 Rue Charles
 Baudelaire
 75012 Paris
 France

SWISS OFFICE

St. Urbangasse 53
 Postfach 1738
 CH-4502 Solothurn
 Switzerland