


## QUAD W SPECIFICATION OPTIONS

Dimensions (mm):	100mm Wide x 85mm Tall
Mounting:	Trimless
Weight (kg):	2Kg
Finish:	Anodised Aluminium, RAL 9003 Fine Texture, RAL 9005 Fine Texture
Emergency:	DALI or Standard 3 hour emergency conversion (300lm output)
Operating voltage:	230v
Driver:	DALI, Switching, Casambi
Colour temperature:	2700K, 3000K, 3500K, 4000K, 5400K,
CRI:	Min 90CRI
TM30:	TBC
Direct light options:	Opal, MPO, Dark diffuser
Lumen options:	500Lm/m, 1000Lm/m, 1500Lm/m 2000Lm/m
Efficacy:	130Lm/w
Lifetime:	100,000 hrs

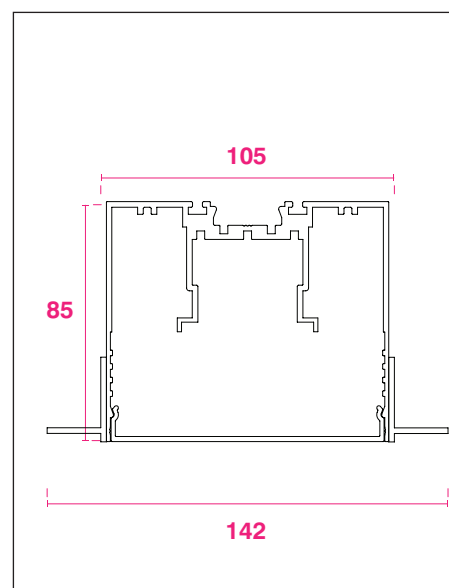

## WATTAGE

	500Lm/m	1000Lm/m	1500Lm/m	2000Lm/m
Opal	3.5W	7.2W	10.8W	15W
MPO	3.9W	7.7W	11.6W	15.5W

CCT 4000K Wattage and delivered lumen output for direct light sources

### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 090824

### HEAD OFFICE

19 Nuffield Way  
Abingdon  
OX14 1RL  
United Kingdom

### SHOWROOM

23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

### PARIS OFFICE

28 Rue Charles  
Baudelaire  
75012 Paris  
France

### SWISS OFFICE

St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

direct light

'O' Opal - Creates a soft even distribution of light

'M' MPO - For maximum visual comfort and UGR 19

'D' Dark - Perfect for visual comfort in an off state in dark environments

**FOR MORE INFORMATION  
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

**HEAD OFFICE**  
19 Nuffield Way  
Abingdon  
OX14 1RL  
United Kingdom

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

# QUAD X

TRIMLESS



## SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - HHHH/I								
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F DIRECT LED	GGG CRI / COLOUR	HHHH LENGTH (mm)	I EMERGENCY
QX	RE SM SP	B W S X*	F D 1 T C	O M D	SL L M H	927 930 940	XXXX* LENGTH IN MM	E

**MOUNTING** 'SM' Surface Mounted, 'SP' Suspended, 'WA' Wall Mounted, 'TM' Recessed Trim, 'RP' Recessed Plaster-in  
**FINISH** 'B' Black, 'W' White, 'S' Silver 'X' Custom  
**DRIVER** 'F' Fixed Output, 'D' DALI, '1' 1-10V, 'T' Touch Dim, 'C' Casambi control  
**DIFFUSER** 'O' Opal, 'M' MPO, 'D' Dark diffuser  
**DIRECT LED** 'SL' 500 Lm/m Low power, 'L' 1000Lm/m Low power, 'M' 1500Lm/m High power, 'H' 2000Lm/m High power  
**CRI / COLOUR** '927' CRI 90+ Colour 2700K, '930' CRI 90+ Colour 3000K, '940' CRI 90+ Colour 4000K  
**LENGTH** 573mm, 854mm, 1140mm, 1420mm, 1976mm, 2537mm and 2818mm standard modular lengths in millimetres  
**EMERGENCY** 'E' Integrated Emergency - specify details alongside code

## LIFETIME DATA

L70		L80		L90	
B10	B50	B10	B50	B10	B50
>100,000 Hrs	>100,000 Hrs	>80,000 Hrs	>90,000 Hrs	>40,000 Hrs	>40,000 Hrs



### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
 EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 090824

### HEAD OFFICE

19 Nuffield Way  
 Abingdon  
 OX14 1RL  
 United Kingdom

### SHOWROOM

23 Bowling Green Lane  
 Clerkenwell  
 London  
 EC1R 0BD

### PARIS OFFICE

28 Rue Charles  
 Baudelaire  
 75012 Paris  
 France

### SWISS OFFICE

St. Urbangasse 53  
 Postfach 1738  
 CH-4502 Solothurn  
 Switzerland