



QUAD X

TRIM

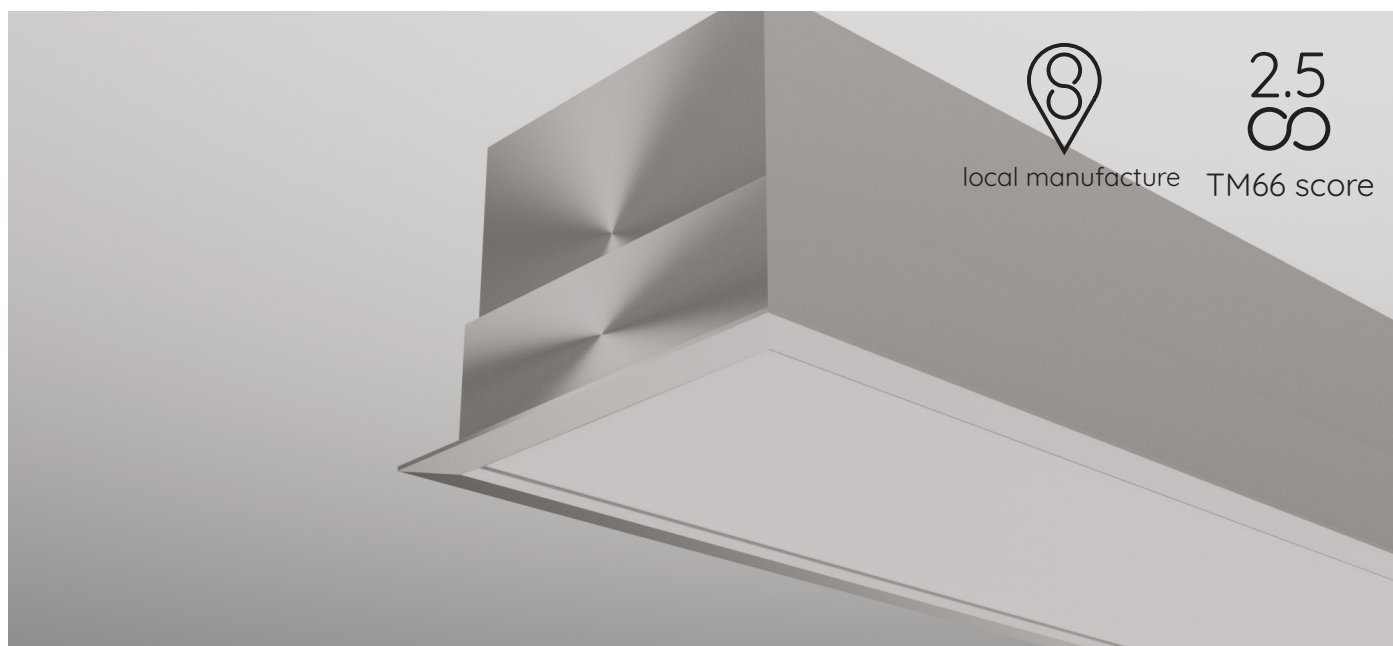

QUAD W SPECIFICATION OPTIONS

Dimensions (mm):	100mm Wide x 85mm Tall
Mounting:	Trim
Weight (kg):	2Kg
Finish:	Anodised Aluminium, RAL 9003 Fine Texture, RAL 9005 Fine Texture
Emergency:	DALI or Standard 3 hour emergency conversion (300lm output)
Operating voltage:	230v
Driver:	DALI, Switching, Casambi
Colour temperature:	2700K, 3000K, 3500K, 4000K, 5400K,
CRI:	Min 90CRI
TM30:	TBC
Direct light options:	Opal, MPO, Dark diffuser
Lumen options:	500Lm/m, 1000Lm/m, 1500Lm/m 2000Lm/m
Efficacy:	130Lm/w
Lifetime:	100,000 hrs

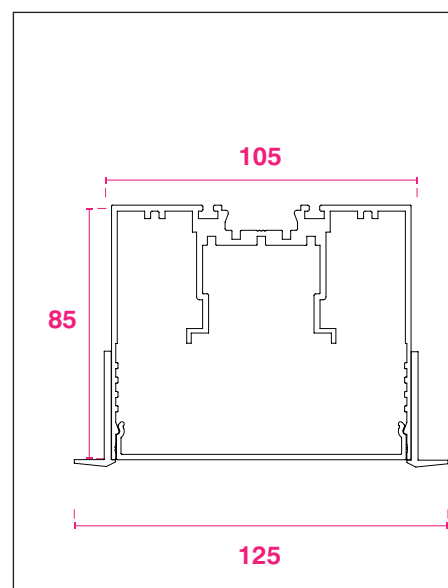

WATTAGE

	500Lm/m	1000Lm/m	1500Lm/m	2000Lm/m
Opal	3.5W	7.2W	10.8W	15W
MPO	3.9W	7.7W	11.6W	15.5W

CCT 4000K Wattage and delivered lumen output for direct light sources

FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 090824

HEAD OFFICE

19 Nuffield Way
Abingdon
OX14 1RL
United Kingdom

SHOWROOM

23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE

28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE

St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

direct light

'O' Opal - Creates a soft even distribution of light

'M' MPO - For maximum visual comfort and UGR 19

'D' Dark - Perfect for visual comfort in an off state in dark environments

**FOR MORE INFORMATION
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

HEAD OFFICE
19 Nuffield Way
Abingdon
OX14 1RL
United Kingdom

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - HHHH/I								
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F DIRECT LED	GGG CRI / COLOUR	HHHH LENGTH (mm)	I EMERGENCY
QX	RE SM SP	B W S X*	F D 1 T C	O M D	SL L M H	927 930 940	XXXX* LENGTH IN MM	E

MOUNTING 'SM' Surface Mounted, 'SP' Suspended, 'WA' Wall Mounted, 'TM' Recessed Trim, 'RP' Recessed Plaster-in
FINISH 'B' Black, 'W' White, 'S' Silver 'X' Custom
DRIVER 'F' Fixed Output, 'D' DALI, '1' 1-10V, 'T' Touch Dim, 'C' Casambi control
DIFFUSER 'O' Opal, 'M' MPO, 'D' Dark diffuser
DIRECT LED 'SL' 500 Lm/m Low power, 'L' 1000Lm/m Low power, 'M' 1500Lm/m High power, 'H' 2000Lm/m High power
CRI / COLOUR '927' CRI 90+ Colour 2700K, '930' CRI 90+ Colour 3000K, '940' CRI 90+ Colour 4000K
LENGTH 573mm, 854mm, 1140mm, 1420mm, 1976mm, 2537mm and 2818mm standard modular lengths in millimetres
EMERGENCY 'E' Integrated Emergency - specify details alongside code

LIFETIME DATA

L70		L80		L90	
B10	B50	B10	B50	B10	B50
>100,000 Hrs	>100,000 Hrs	>80,000 Hrs	>90,000 Hrs	>40,000 Hrs	>40,000 Hrs



FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
 EMAIL: sales@optelma.co.uk

ISSUE DATE: 090824

HEAD OFFICE

19 Nuffield Way
 Abingdon
 OX14 1RL
 United Kingdom

SHOWROOM

23 Bowling Green Lane
 Clerkenwell
 London
 EC1R 0BD

PARIS OFFICE

28 Rue Charles
 Baudelaire
 75012 Paris
 France

SWISS OFFICE

St. Urbangasse 53
 Postfach 1738
 CH-4502 Solothurn
 Switzerland