


# LITTLE IVY

## TRIMLESS DOWNLIGHT



### KEY FEATURES

- Trimless Recessed Round Downlight
- Matt White luminaire housing
- Bridgelux Thrive LED Engine
- CRI 98+
- 15°, 24°, 38°, 55° Flood beam angles
- 25° directional adjustability
- 2700K, 3000K, 4000K & Dim to Warm (1800k-3000k)
- L&TE, 1-10v, DALI Dimming or Casambi control
- Secondary reflector with a choice of finishes



**CASAMBI**

**60 YEARS  
IN LIGHT**

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 23/11/20

**HEAD OFFICE**  
19 Nuffield Way  
Abingdon Oxfordshire  
OX14 1RL United  
Kingdom

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London EC1R 0BD  
United Kingdom

**FRANCE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWITZERLAND**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## LITTLE IVY TRIMLESS DOWNLIGHT SPECIFICATIONS


PRODUCT OPTIONS	
Dimensions (mm):	See table below
Weight (kg):	< 1.0 kg
Lifetime:	50,000 hrs
Mounting type:	Trimless Recessed
Finish:	Trim: Matt White Reflector: Matt White, Matt Black, Gold, Specular Black, Matt Silver*
Emergency:	N/A
Operating voltage:	230V
IP Rating:	IP20 or IP54
Direct Light source:	6W Bridgelux Thrive LED
Driver:	L&TE, DALI dimming, Casambi control
Colour temperature:	2700K, 3000K, 4000K or Tuneable White (270K-6500K)
Beam Angle:	15°, 24°, 38°, 55°
Diffuser:	N/A
CRI:	98
Optional Extras:	Honeycomb anti-glare, Soft beam lense or Spread lense

\* Many more reflector finishes available on request. Lead times may vary.


### CHOOSE FROM OUR RANGE OF SIZES AND OUTPUTS

Dimensions	Cut-out	Power	2700K	3000K	4000K
Ø51 x 87 mm	Ø55 mm	8 W	404lm	440 lm	478 lm

\* Figures shown for 24° outputs

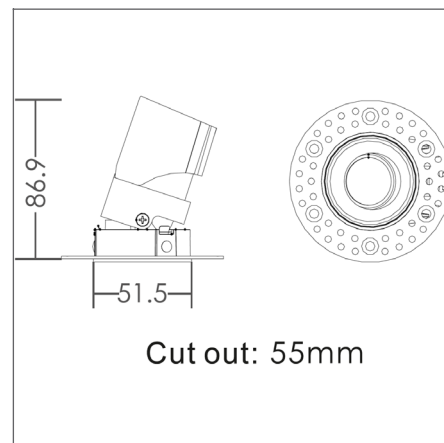

LITTLE IVY TRIMLESS DIMENSIONS (MM)

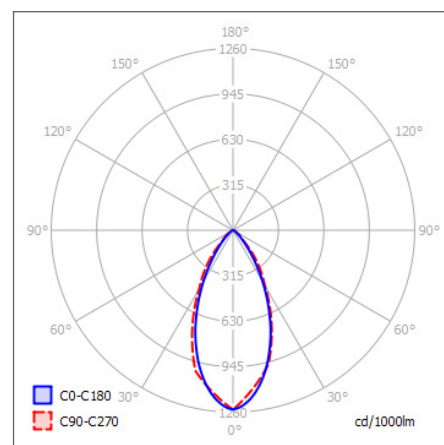

POLAR CURVE 55° 4000K



**CASAMBI**

**60 YEARS  
IN LIGHT**

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk

ISSUE DATE: 23/11/20

**HEAD OFFICE**  
19 Nuffield Way  
Abingdon Oxfordshire  
OX14 1RL United  
Kingdom

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London EC1R 0BD  
United Kingdom

**FRANCE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWITZERLAND**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## LITTLE IVY TRIMLESS DOWNLIGHT COMPONENTS




**8W LED ENGINE**  
with Bridgelux Thrive  
LED chips, CRI 98.




**GLOBAL OPTIC**  
15°, 24°, 38° and 55°  
beam angles.



**WHITE REFLECTOR**  
Standard clip-in bezel  
finishes.




**BLACK REFLECTOR**  
Standard clip-in bezel  
finishes.



**GOLD REFLECTOR**  
Standard clip-in bezel  
finishes.



**MATT SILVER REFLECTOR**  
Standard clip-in bezel  
finishes.



**PREMIUM DRIVERS**  
L&TE and DALI  
drivers.



**CASAMBI CONTROL**  
Casambi bluetooth  
control modules.



**CASAMBI**

**60 YEARS  
IN LIGHT**

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 23/11/20

### HEAD OFFICE

19 Nuffield Way  
Abingdon Oxfordshire  
OX14 1RL United  
Kingdom

### SHOWROOM

23 Bowling Green Lane  
Clerkenwell  
London EC1R 0BD  
United Kingdom

### FRANCE

28 Rue Charles  
Baudelaire  
75012 Paris  
France

### SWITZERLAND

St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## LITTLE IVY TRIMLESS DOWNLIGHT SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - HHH/I								
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E BEAM ANGLE	F DIRECT LED	GGG CRI / COLOUR	HHH DIAMETER / SIZE (mm)	I EMERGENCY
LIVY	RT	W X*	L D C	T S M F	L	927 930 940 9TW		N/A

*	<b>X</b> Custom Options - specify details alongside code
PRODUCT ID	<b>'LITTLE IVY'</b> Little Ivy Downlight
MOUNTING	<b>RT</b> Recessed Trimless
FINISH	<b>W</b> Matt White*
DRIVER	<b>L</b> L&TE, <b>D</b> DALI, <b>C</b> Casambi
BEAM ANGLE	<b>T</b> 15° Tight Spot, <b>S</b> 24° Spot, <b>M</b> 38° Medium, <b>F</b> 55° Flood
DIRECT LED	<b>L</b> Low power 6.1W
CRI / COLOUR	<b>'927'</b> CRI 98 Colour 2700K, <b>'930'</b> CRI 98 Colour 3000K, <b>'940'</b> CRI 98 Colour 4000K, <b>'9DW'</b> CRI 98 Dim to Warn
DIAMETER / SIZE	Luminaire diameter in millimetres
EMERGENCY	N/A

\*For Clip-in Reflector finishes specify details alongside code:  
+WHITE / +BLACK / +GOLD / +SILVER / +SPECULAR

### STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

### MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

### BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



**CASAMBI**

**60 YEARS  
IN LIGHT**

CALL: +44 (0) 1235 55 37 69

EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 23/11/20

#### HEAD OFFICE

19 Nuffield Way  
Abingdon Oxfordshire  
OX14 1RL United  
Kingdom

#### SHOWROOM

23 Bowling Green Lane  
Clerkenwell  
London EC1R 0BD  
United Kingdom

#### FRANCE

28 Rue Charles  
Baudelaire  
75012 Paris  
France

#### SWITZERLAND

St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland