


# LED FLEX

## BENDABLE MINIATURE LED SOLUTION

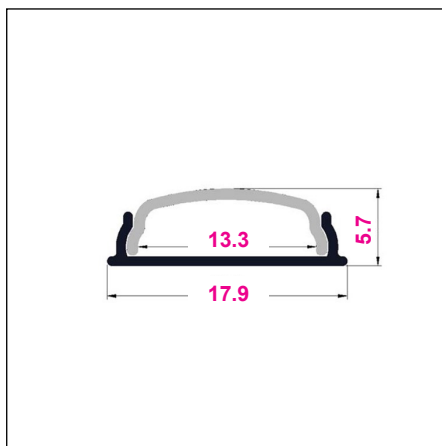

## LED FLEX SPECIFICATION OPTIONS

Dimensions (mm):	17.9 (W) x 5.7 (H)
Cut-out (mm):	-
Lifetime:	50,000 hrs
Finish:	Aluminium
Emergency:	On request
IP Rating:	20 as standard. 65, 67 or 68 on request (LED strip only)
Driver:	Switched, DALI, Casambi
Colour temperature:	2700K, 3000K, 4000K, 6500K
Beam Angle:	-
Diffuser:	Opal, Semi Translucent
CRI:	90+
TM30:	-
Optional Extras:	Magnetic mounting strip

### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 11/09/20

### HEAD OFFICE

19 Nuffield Way  
Abingdon  
Oxfordshire  
OX14 1RL

### SHOWROOM

23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

### PARIS OFFICE

28 Rue Charles  
Baudelaire  
75012 Paris  
France


### SWISS OFFICE

St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## LED FLEX OUTPUT DATA

### DIRECT OPAL IP20 LED STRIP

LED Strip	Delivered (lm/M)	Power (W/M)
Minimum	472	3.6
Low	891	7.2
Medium	1255	10.8
High	1836	14.4
Super High	2304	19.2
Maximum	3132	28.8

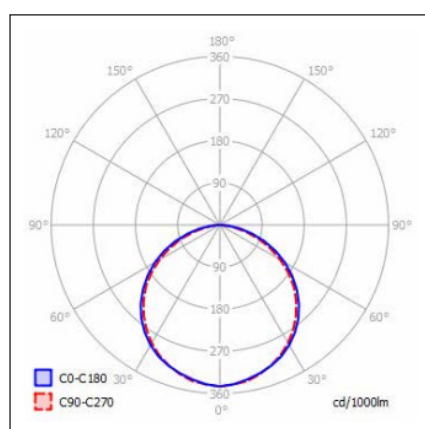

#### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 11/09/20

**HEAD OFFICE**  
19 Nuffield Way  
Abingdon  
Oxfordshire  
OX14 1RL

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland