


TUBE 60


PENDANT

OPTELMA
ARCHITECTURAL LIGHTING

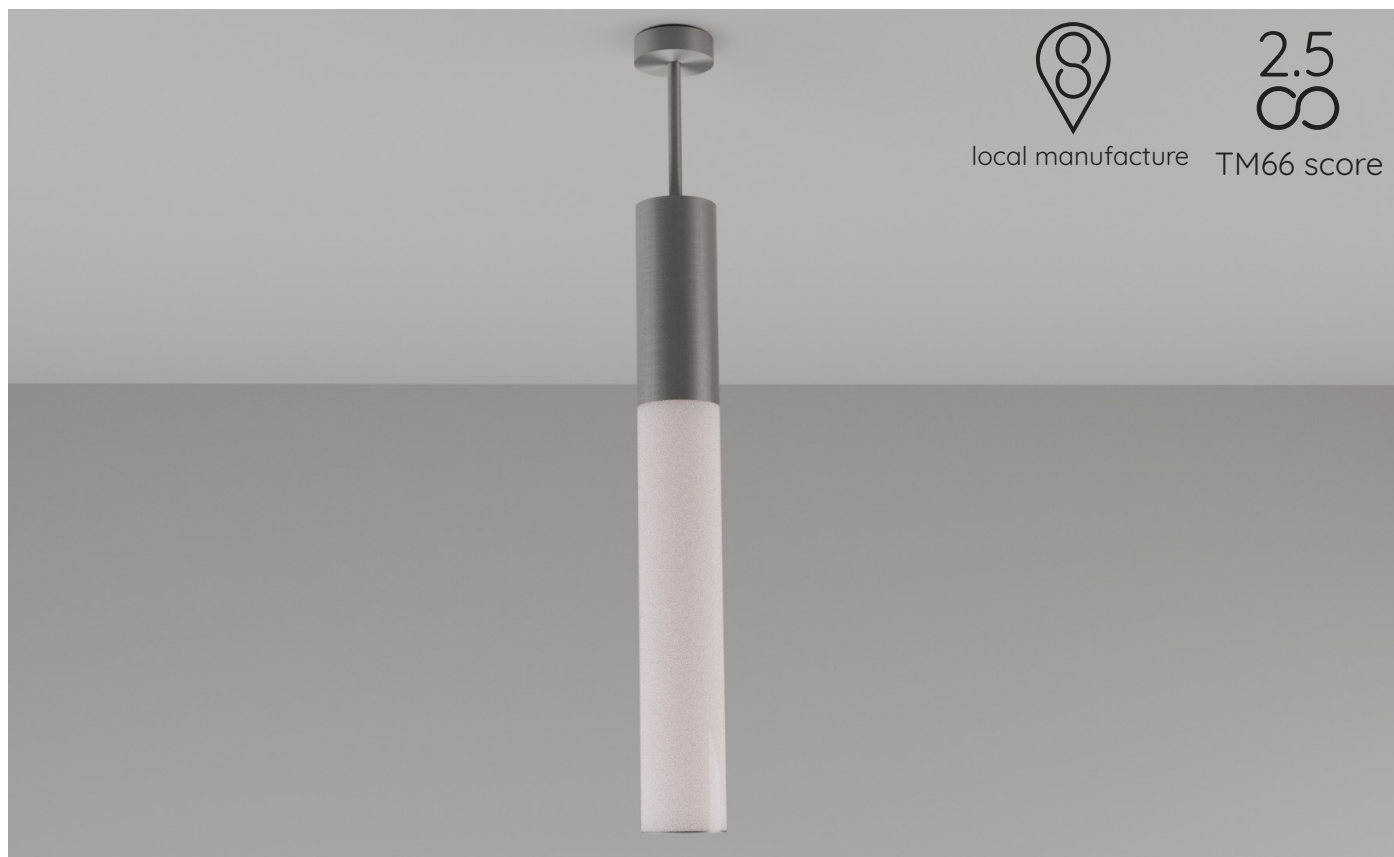

SPECIFICATION OPTIONS

Dimensions (mm):	60mm Diameter
Mounting:	Suspended
Weight (kg):	1Kg/m
Finish:	Anodised Aluminium, RAL 9003 Fine Texture, RAL 9005 Fine Texture
Emergency:	DALI or Standard 3 hour emergency conversion (30% driver output)
Operating voltage:	24VDC
Driver:	DALI, Switching, Casambi
Colour temperature:	2700K, 3000K, 3500K, 4000K, 5400K,
CRI:	Min 90CRI
TM30:	TBC
Direct light options:	Opal
Lumen options:	up to 2000Lm/m
Efficacy:	70Lm/w
Lifetime:	100,000 hrs

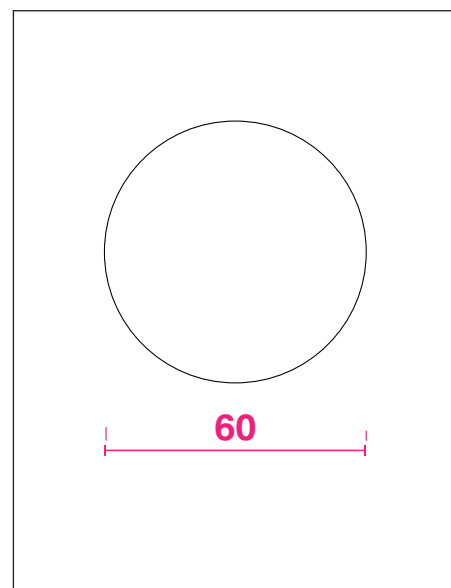

FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

TUBE 60

PENDANT

SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - HHHH/I								
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F LED	GGG CRI / COLOUR	HHH LENGTH (mm)	I EMERGENCY
T60	VS	B W S X*	F D 1 T C	0	M H	927 930 940	XXXX* LENGTH IN MM	E

MOUNTING	'SM' Surface Mounted,
FINISH	'B' Black, 'W' White, 'S' Silver 'X' Custom
DRIVER	'F' Fixed Output, 'D' DALI, '1' 1-10V, 'T' Touch Dim, 'C' Casambi control
DIRECT DIFFUSER	'O' Opal,
LED	'M' 1000Lm/m Medium power, 'H' 2000Lm/m High power
CRI / COLOUR	'927' CRI 90+ Colour 2700K, '930' CRI 90+ Colour 3000K, '940' CRI 90+ Colour 4000K
LENGTH	500mm, 1000mm, 1500mm, 2000mm, 2500mm standard modular lengths in millimetres
EMERGENCY	'E' Integrated Emergency - specify details alongside code

LIFETIME DATA

L70		L80		L90	
B10	B50	B10	B50	B10	B50
> 100,000 Hrs	> 100,000 Hrs	> 80,000 Hrs	> 90,000 Hrs	> 40,000 Hrs	> 40,000 Hrs



FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland