

KEY FEATURES

- Mini Profile with tubular diffuser
- Suspended or Surface Mounted
- Made-to-measure lengths (Max. single run 3000mm)
- Silver Anodised, colours available on request
- IP20, higher IP available on request
- Wide range of LED sources available (up to 12mm wide).
- Driver/control options include Fixed Output, Mains Dimmable, 1-10V Dimmable, DALI Dimmable and Casambi control.



FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/09/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD


PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

**60 YEARS
IN LIGHT**

SPECIFICATION OPTIONS

PRODUCT OPTIONS	
Dimensions (mm):	30 (D) x 3000mm or Made-to-Measure Lengths
Mounting:	Surface mounted or suspended
Lifetime:	50,000hrs
Finish:	Anodised Aluminium, Anodised Black, Anodised White
Emergency:	Remote 3-hour emergency conversion on request (not full length)
Operating voltage:	24V
Driver:	Fixed Output, Mains Dimmable, DALI, 1-10V, Casambi
Colour temperature:	2700K, 3000K, 4000K, 6500K, Tuneable 2700K-6500K, RGB, RGBW
CRI:	90+
Light source:	Selected linear LED options listed below
Diffuser:	Opal Clip-In, Clear Clip-in
IP Rating:	IP20 (IP rated on request)
Optional Extras:	Additional finished & LED sources on request

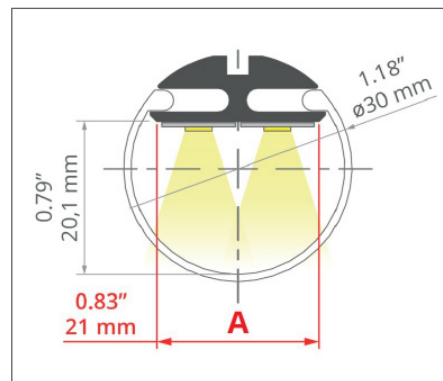

CUSTOMISE YOUR LIGHTING SPECIFICATIONS WITH OUR RANGE OF LED TAPES & BOARDS

LIGHT SOURCE	LUMEN OUTPUT	POWER	CUT-POINTS
Opteflex Ultra-Low Power LED	338-358 lm/M	4.8 W/M	50mm
Opteflex Low Power LED	676-715 lm/M	9.6 W/M	50mm
Opteflex Medium Power LED	715-910 lm/M	14.4 W/M	50mm
Opteflex High Power LED	1378-1463 lm/M	19.2 W/M	50mm
Opteflex Ultra-High Power LED	1735-1820 lm/M	28.8 W/M	50mm
Opteflex Tuneable White LED	897-1853 lm/M	19.2 W/M	50mm
Opteflex RGB Colour LED	436 lm/M (MAX)	15 W/M	62.5mm
Opteflex RGBW Colour LED	488 lm/M (MAX)	30.8 W/M	62.5mm

* Choose from our full range of LED Tapes & Boards online



FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/09/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire
OX14 3YT

SHOWROOM
23 Bowling Green Lane
Clerkenwell
London
EC1R 0BD

PARIS OFFICE
28 Rue Charles
Baudelaire
75012 Paris
France

SWISS OFFICE
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

**60 YEARS
IN LIGHT**

SPECIFICATION CODE

AAAA - BB/C/D/E - FF/GG - H								
AAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	FF COLOUR TEMP	G LIGHT SOURCE	HHH LENGTH (mm)	F EMERGENCY
JAZ	SM SU	A B W X*	F M D 1 C	O C	27 30 40 65 TW RGB RGBW	UL M H UH	XXXX* ENTER CUSTOM LENGTH	E

MOUNTING **'SM'** Surface Mounted, **'SU'** Suspended

FINISH **'A'** Anodised Aluminium, **'B'** Black, **'W'** White, **'X'** Other - specify details alongside code

DRIVER **'F'** Fixed Output, **'M'** Mains Dim, **'D'** DALI, **'1'** 1-10V, **'C'** Casambi

DIFFUSER **'O'** Opal, **'C'** Clear

COLOUR TEMPERATURE **'27'** Colour 2700K, **'30'** Colour 3000K, **'40'** Colour 4000K, **'65'** Colour 6500K, **'TW'** Tuneable White

LIGHT SOURCE **'UL'** Ultra-Low Output, **'L'** Low Output, **'M'** Medium Output **'H'** High Output, **'UH'** Ultra-High Output

LENGTH Made-to-Measure length in millimetres

EMERGENCY **'E'** Emergency available on request

* **'X'** Custom Options - specify details alongside code


60 YEARS
IN LIGHT
**FOR MORE INFORMATION
OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69

EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/09/20

HEAD OFFICE
 The Science Park
 Abingdon
 Oxfordshire
 OX14 3YT

SHOWROOM
 23 Bowling Green Lane
 Clerkenwell
 London
 EC1R 0BD

PARIS OFFICE
 28 Rue Charles
 Baudelaire
 75012 Paris
 France

SWISS OFFICE
 St. Urbangasse 53
 Postfach 1738
 CH-4502 Solothurn
 Switzerland