





JAZ TWIN

MINI PROFILE



KEY FEATURES

- Site-specific lengths to the nearest millimetre, lit continuously
- Vertical or horizontal suspended profile with multi directional lighting solution.
- Clip in curved opal diffuser.
- A wide range of available LED sources from 4.8W to 28.8W, including RGB, RGBW and Tunable White
- Control options include Fixed Output, DALI, 1-10V or DMX
- Anodised Aluminium, Black or white, with other RAL finishes available on request.

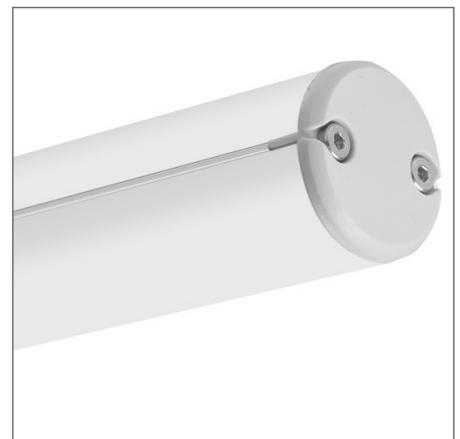

60 YEARS
IN LIGHT

CALL: +44 (0) 1235 55 37 69
EMAIL: sales@optelma.co.uk
ISSUE DATE: 21/01/20

HEAD OFFICE
The Science Park
Abingdon
Oxfordshire OX14 3YT
United Kingdom


SHOWROOM
23 Bowling Green Lane
Clerkenwell
London EC1R 0BD
United Kingdom

FRANCE
28 Rue Charles
Baudelaire
75012 Paris
France


SWITZERLAND
St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland

JAZ TWIN SPECIFICATIONS

PRODUCT OPTIONS	
Dimensions (mm):	30 (Dia) x <i>Made-to-Measure Lengths</i>
Cut-out (mm):	N/A
Weight (kg):	< 1.0 kg per Metre
Lifetime:	50,000 hrs
Mounting type:	Suspended Vertical, Suspended Horizontal
Finish:	Anodised Aluminium, Black, White
Emergency:	Remote 3-hour emergency conversion on request (not full length)
Operating voltage:	24V
IP Rating:	IP20 (IP Rated on request)
Light source:	Selected linear LED options listed below
Driver:	Fixed Output, 1-10V, DALI, DMX
Colour temperature:	2700K, 3000K, 4000K, 6500K, Tuneable 2700K-6500K, RGB, RGBW
Beam Angle:	Multi Directional
Diffuser:	Opal Clip-In
CRI:	90+
Optional Extras:	Additional finishes & LED sources on request

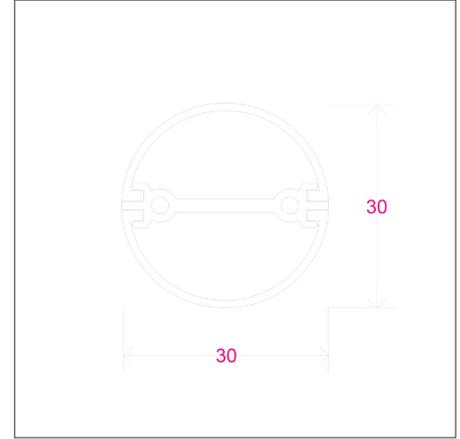

CROSS-SECTION DIMENSIONS (MM)

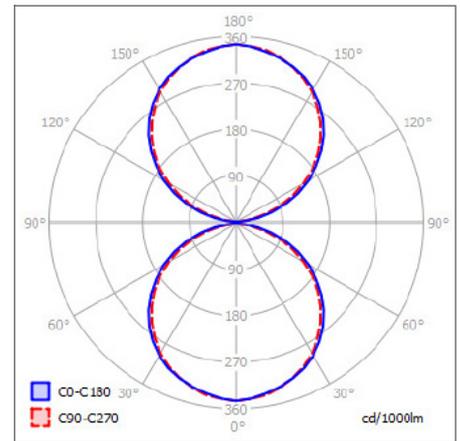

POLAR CURVE 4000K OPAL

CUSTOMISE YOUR LIGHTING SPECIFICATIONS WITH OUR RANGE OF LED TAPES & BOARDS

Light Source*	Lumen Output	Power	LED / Metre	Cut-points
Opteflex Ultra-Low Power LED	338-358 lm/M	4.8 W/M	120	50 mm
Opteflex Low Power LED	676-715 lm/M	9.6 W/M	120	50 mm
Opteflex Medium Power LED	715-910 lm/M	14.4 W/M	120	50 mm
Opteflex High Power LED	1378-1463 lm/M	19.2 W/M	140	50 mm
Opteflex Ultra-High Power LED	1735-1820 lm/M	28.8 W/M	140	50 mm
Opteflex RGB Colour LED	436 lm/M (MAX)	15 W/M	96	62.5 mm
Opteflex RGBW Colour LED	488 lm/M (MAX)	30.8 W/M	96	62.5 mm
Opteflex Tuneable White LED	897-1853 lm/M	19.2 W/M	140	50 mm

* Choose from our full range of LED Tapes & Boards online.



**60 YEARS
IN LIGHT**

CALL: +44 (0) 1235 55 37 69

EMAIL: sales@optelma.co.uk

ISSUE DATE: 21/01/20

HEAD OFFICE

The Science Park
Abingdon
Oxfordshire OX14 3YT
United Kingdom

SHOWROOM

23 Bowling Green Lane
Clerkenwell
London EC1R 0BD
United Kingdom

FRANCE

28 Rue Charles
Baudelaire
75012 Paris
France

SWITZERLAND

St. Urbangasse 53
Postfach 1738
CH-4502 Solothurn
Switzerland