


## QUAD 38 + LINEAR SYSTEM



### KEY FEATURES

- Recessed, Surface, Wall Mounted and Suspended linear lights
- Standard modular lengths with Fast-Track lead times
- Direct or Direct-Indirect lighting with a choice of Medium/High Power, Lens Louver and Asymmetric Wallwash LED
- Compact fixed output drivers, or a range of dimming options including DALI, 1-10V, Switch-Dim or Casambi control
- Available on request - corner modules, curves, sensors, Integrated emergency conversions, IP54 rated and more
- White, Black, Silver, Graphite, Copper and Champagne finish



**CASAMBI**

**60 YEARS  
IN LIGHT**

#### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
EMAIL: [sales@optelma.co.uk](mailto:sales@optelma.co.uk)

ISSUE DATE: 11/09/20

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD


**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland


**QUAD 38 + SPECIFICATIONS**

PRODUCT OPTIONS	
Dimensions (mm):	Direct Only: 38 (W) x 75 (H), Direct-Indirect: 38 (W) x 85 (H)*
Cut-out (mm):	Direct Only: 42 (W) x 120 (H) including recessing bracket
Lifetime:	50,000 hrs
Mounting type:	Recessed, Surface, Suspended, Wall Mounted
Finish:	White, Black, Silver, Champagne Gold, Copper, Graphite
Emergency:	DALI or Standard emergency conversion
Operating voltage:	230V
IP Rating:	IP20 (IP54 Rated version on request)
Light source:	Medium Power, High Power
Driver:	Fixed Output, 1-10V, DALI, Touch Dim, Casambi control
Colour temperature:	2200K, 2700K, 3000K, 3500K, 4000K, 6500K
Beam Angle:	(Direct only 100% or Direct-Indirect 45/55%)
Diffuser:	Opal, MPO, Ambient, Asymmetric Wallwash (Lens Louver on request)
CRI:	CRI80, CRI90
Optional Extras:	Integrated Track, sensors, spotlights and 90° corners on request


\*Luminaire dimensions may vary with mounting type.

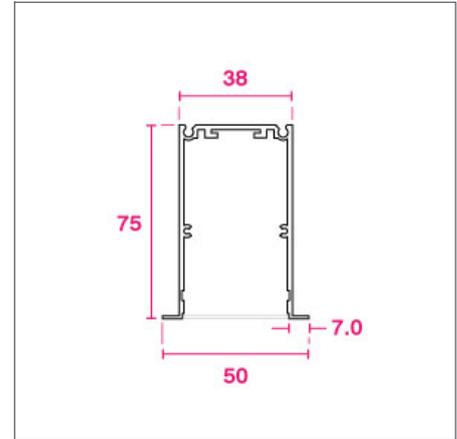

CROSS-SECTION RECESSED DIRECT (MM)

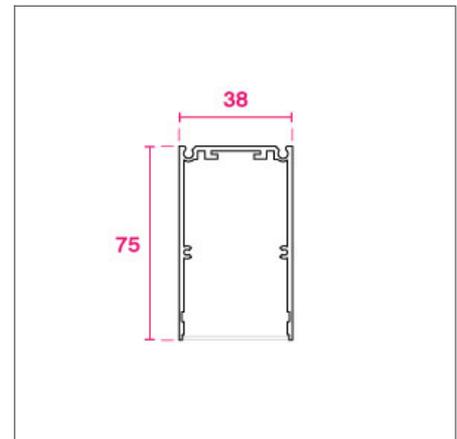

CROSS-SECTION SURFACE DIRECT (MM)

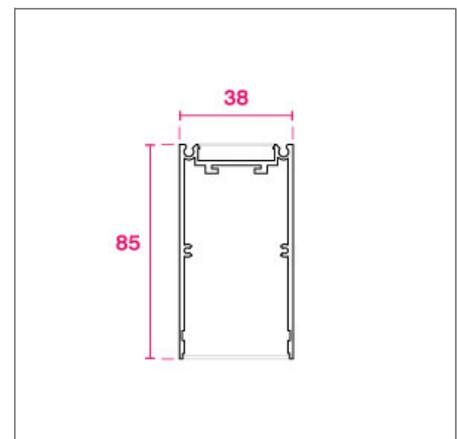

CROSS-SECTION DIRECT-INDIRECT (MM)

**CHOOSE A MODULAR LENGTH AND LIGHT SOURCE**

Recessed Modules	Medium Power Direct only*	High Power Direct only*	Wall-wash Med. Direct only*	Wall-wash High Direct only*
610	900lm/9W	1220lm/12W	880lm/9W	1180lm/12W
900	1350lm/13W	1830lm/17W	1310lm/13W	1780lm/17W
1192	1810lm/16W	2440lm/22W	1750lm/16W	2370lm/22W
1485	2260lm/20W	3050lm/26W	2190lm/20W	2960lm/26W
1775	2710lm/23W	3660lm/31W	2630lm/23W	3550lm/31W
2065	3160lm/26W	4270lm/35W	3070lm/26W	4140lm/35W

Surface Modules	Medium Power Direct only*	High Power Direct only*	Wall-wash Med. Direct only*	Wall-wash High Direct only*
600	900lm/9W	1220lm/12W	880lm/9W	1180lm/12W
890	1350lm/13W	1830lm/17W	1310lm/13W	1780lm/17W
1182	1810lm/16W	2440lm/22W	1750lm/16W	2370lm/22W
1475	2260lm/20W	3050lm/26W	2190lm/20W	2960lm/26W
1765	2710lm/23W	3660lm/31W	2630lm/23W	3550lm/31W
2055	3160lm/26W	4270lm/35W	3070lm/26W	4140lm/35W

\*Luminaire luminous flux with Opal diffuser at 4000K.



**60 YEARS  
IN LIGHT**

**FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:**

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk  
ISSUE DATE: 11/09/20

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland


Suspended Modules	Medium Power Direct only*	High Power Direct only*	Wall-wash Med. Direct only*	Wall-wash High Direct only*
890	1350lm/13W	1830lm/17W	1310lm/13W	1780lm/17W
1182	1810lm/16W	2440lm/22W	1750lm/16W	2370lm/22W
1475	2260lm/20W	3050lm/26W	2190lm/20W	2960lm/26W
1765	2710lm/23W	3660lm/31W	2630lm/23W	3550lm/31W
2055	3160lm/26W	4270lm/35W	3070lm/26W	4140lm/35W

Suspended Modules	Medium Power Direct-indirect*	High Power Direct-indirect*	Wall-wash Med. Direct-indirect*	Wall-wash High Direct-indirect*
890	2890lm/22W	3910lm/30W	2850lm/22W	3850lm/30W
1182	3920lm/29W	5300lm/39W	3860lm/29W	5220lm/39W
1475	4940lm/35W	6680lm/48W	4880lm/35W	6590lm/48W
1765	5970lm/42W	8070lm/58W	5890lm/42W	7960lm/58W
2055	7000lm/48W	9460lm/66W	6900lm/48W	9330lm/66W


\*Luminaire luminous flux with Opal diffuser at 4000K. Dir.100% or Dir-Ind.45/55%

Wall Modules	Medium Power Direct only*	High Power Direct only*	Medium Power Direct-indirect*	High Power Direct-indirect*
600	-	-	2130lm/20W	2920lm/27W
890	1120lm/16W	1540lm/21W	3200lm/28W	4380lm/39W
1182	1500lm/20W	2050lm/27W	4260lm/35W	5840lm/50W
1475	1870lm/24W	2560lm/33W	5320lm/44W	7300lm/63W
1765	2240lm/28W	3080lm/39W	6390lm/52W	8760lm/75W
2055	2620lm/31W	3590lm/44W	7450lm/61W	10220lm/88W

\*Luminaire luminous flux with Opal diffuser at 4000K. Dir-Ind.50/50% (Indirect only on request)






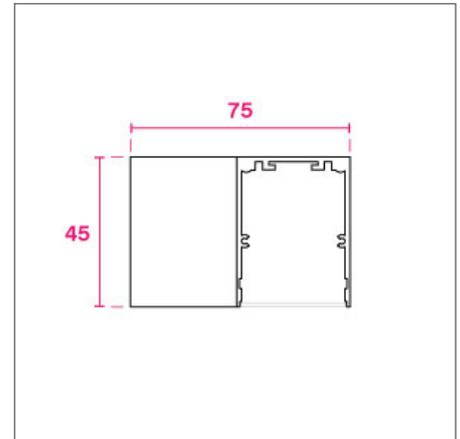


CROSS-SECTION WALL DIR (MM)

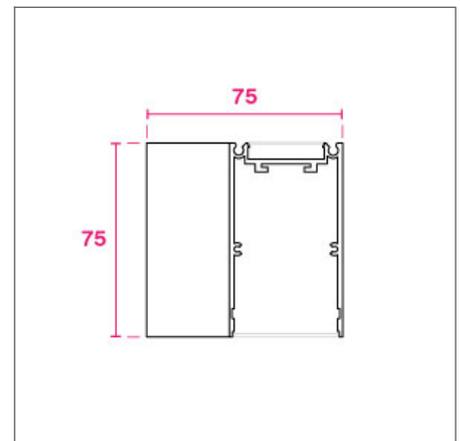

CROSS-SECTION WALL DIR-IND (MM)

## QUAD 38 + COMPONENTS

	<b>MATT WHITE</b> Powder-coated Matt White painted finish.		<b>MATT BLACK</b> Powder-coated Matt Black painted finish.		<b>MATT SILVER</b> Powder-coated Matt Silver painted finish.
	<b>GRAPHITE</b> Powder-coated graphite finish.		<b>CHAMPAGNE</b> Powder-coated champagne finish.		<b>COPPER</b> Powder-coated copper finish.
	<b>LENS LOUVER</b> Anti-glare Lens Louver on request.		<b>90° CORNER</b> Opal or MPO mitred corner modules.		<b>CURVE OPAL</b> 90° curved corners R500, R750, R1000, R1250, R1500, R1750



**60 YEARS**  
IN LIGHT

### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/09/20

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland

## QUAD 38 + SPECIFICATION CODE

AAAA - BB/C/D/E - F/GGG - HHHH/I										
AAAA PRODUCT ID	BB MOUNTING	C FINISH	D DRIVER	E DIFFUSER	F DIRECT LED	GGG CRI/ COLOUR	F INDIRECT LED	GGG CRI/ COLOUR	HHH LENGTH (mm)	I EMERGENCY
QU38	RE SM SP WM	B W S G C X*	F D 1 T C	O M A W L	L M H	827 830 840 927 930 940	L M H	827 830 840 927 930 940	XXXX* LENGTH IN MM	E

- MOUNTING **RE** Recessed, **SM** Surface Mounted, **SP** Suspended Parallel, **WM** Wall Mounted
- FINISH **B** Black, **W** White, **S** Silver, **G** Champagne Gold, **C** Copper
- DRIVER **F** Fixed Output, **D** DALI, **1** 1-10V, **T** Touch Dim, **C** Casambi control
- DIFFUSER **O** Opal, **M** MPO, **A** Ambient, **W** Asymmetric Wallwasher, **L** Lens Louver
- DIRECT LED **L** Low power, **M** Medium power, **H** High power
- CRI / COLOUR **827** CRI 80+ Colour 2700K, **830** CRI 80+ Colour 3000K, **840** CRI 80+ Colour 4000K, **927** CRI 90+ Colour 2700K, **930** CRI 90+ Colour 3000K, **940** CRI 90+ Colour 4000K
- INDIRECT LED **L** Low power, **M** Medium power, **H** High power (LEAVE SECTION BLANK IF DIRECT ONLY)
- CRI / COLOUR **827** CRI 80+ Colour 2700K, **830** CRI 80+ Colour 3000K, **840** CRI 80+ Colour 4000K, **927** CRI 90+ Colour 2700K, **930** CRI 90+ Colour 3000K, **940** CRI 90+ Colour 4000K
- LENGTH Modular lengths in millimetres
- EMERGENCY **E** Integrated Emergency - specify details alongside code

+ **IP54** Ingress Protection - specify alongside code

### STANDARD

Standard fixed option products for quick and easy specification. Point source LED and Linear LED solutions, organised into Track & Spots, Downlights, Recessed, Surface, Suspended and Wall mounted solutions.

### MADE-TO-MEASURE

Versatile systems and luminaires with custom specifications for project-specific lighting. Available in custom sizes and lengths, with many options including curves, corners, finishes, integrated accessories and more.

### BESPOKE

Bespoke luminaires demonstrating completely custom project solutions, designed with the clients from concept to delivery. Learn about the design process and inspire your next bespoke lighting project.



**60 YEARS  
IN LIGHT**

#### FOR MORE INFORMATION OR TO TALK ABOUT A PROJECT:

CALL: +44 (0) 1235 55 37 69  
EMAIL: sales@optelma.co.uk

ISSUE DATE: 11/09/20

**HEAD OFFICE**  
The Science Park  
Abingdon  
Oxfordshire  
OX14 3YT

**SHOWROOM**  
23 Bowling Green Lane  
Clerkenwell  
London  
EC1R 0BD

**PARIS OFFICE**  
28 Rue Charles  
Baudelaire  
75012 Paris  
France

**SWISS OFFICE**  
St. Urbangasse 53  
Postfach 1738  
CH-4502 Solothurn  
Switzerland