



EUTRAC Recessed

Product Code: URXX.XX.XXX.XX

Product description:

The Eutrac Recessed 230V track system can be recessed into a ceiling, or integrated within a Linear System such as Quad or Tadoo. It is a three-circuit track system made from extruded aluminium profile and two PVC support profiles, each with two embedded 2.5mm cross-section copper conductors. Driver options include on/off, DALI and 1-10v dimming. It is supplied in 1, 2, 3 or 4 metre sections in colour finishes Black, White, Aluminium or any RAL specified, and can be easily cut to exact lengths on-site.


5 YEAR
GUARANTEE

Product options	For exact specifications create a Project Datasheet
Dimensions (mm):	59 (W) x 42 (H) x 2000, 3000 or 4000 (L)
Cut-out (mm):	40 (W) x 42 (H) x lengths cut on-site
Lifetime:	50,000 hrs
Mounting type:	Recessed
Finish:	Matt Black, Matt White, Anodised Aluminium, Grey
Emergency:	

Lighting options	For exact specifications create a Project Datasheet
Light source:	Choose any compatible 230V Spotlights
Driver:	Fixed Output, 0-10V, L&TE, DALI, DMX
Colour temperature:	
Beam angle:	
Diffuser:	
Operating voltage:	230V
IP Rating:	IP20
CRI:	
Delivered Lumens (lm):	
Power consumption (W):	Maximum Load 3600W
Efficiency (lm/W):	
Optional Extras:	Endfeed (R/L), Straight Coupler, End Cap, X-coupler and more...

Additional Info
Max load on flange: 4kg/metre

Cross-section

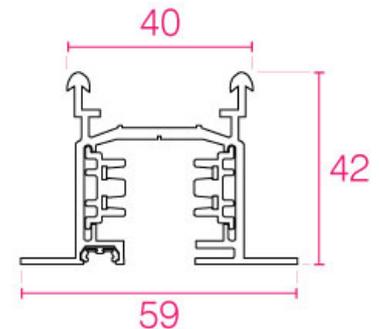

Accessories

